

LORO-X COMPOSITE BEND 15 DEGREE DN 80

LORO-Composite Pipe Bend 15 degrees DN 80

Текст за тръжна документация

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 15 degrees, DN 80




Данни за артикула

ЕАН код	4038088086391
ЕТИМ клас	EC003024
Номинален диаметър	DN 80
Номинална дължина/градус	15
Външни размери (ВxШxД)	133 x 164 x 239 mm
Тегло	2,30 Kg (STK)
Продуктова група	3
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

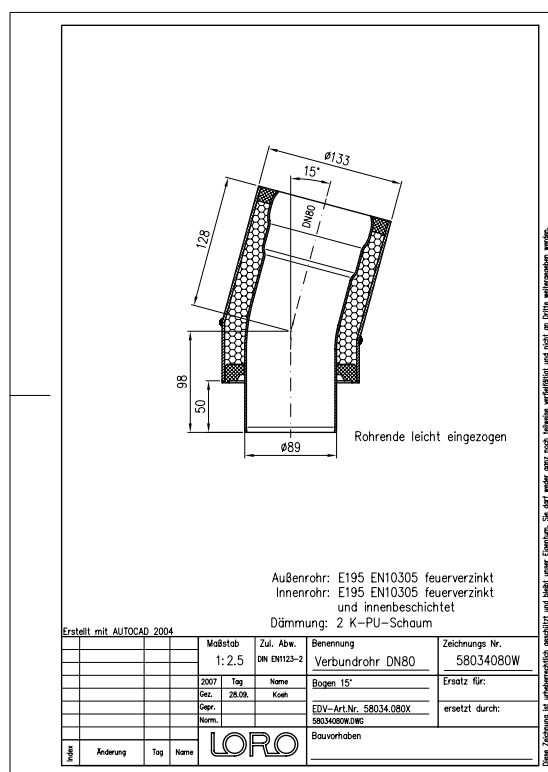

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)