LORO-X COMPOSITE BEND 15 DEGREE DN 80

LORO-Composite Pipe Bend 15 degrees DN 80

Tarjouspyyntöteksti

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 15 degrees, DN 80

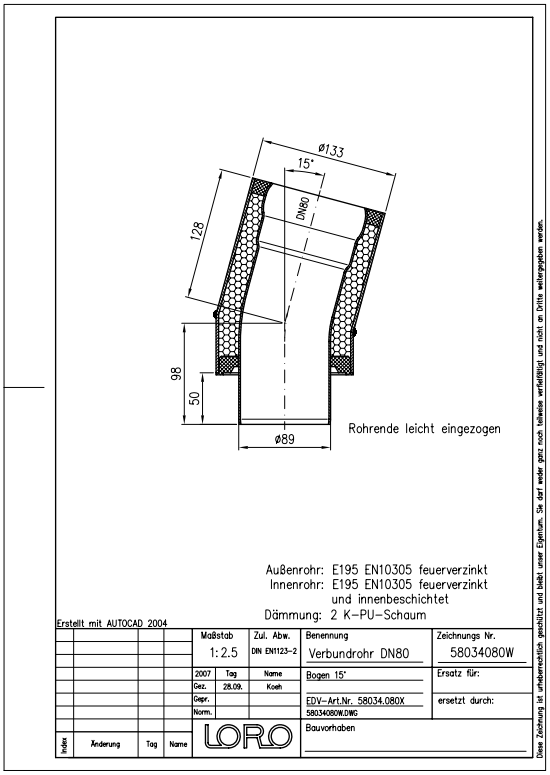

Tuotetiedot

EAN-koodi	**4038088086391**
ETIM-luokka	**EC003024**
Nimellishalkaisija	**DN 80**
Nimellispituus/-aste	**15**
Ulkomitat (KxLxS)	**133 x 164 x 239 mm**
Paino	**2,30 Kg (STK)**
Tuoteryhmä	**3**
Tullitariffin numero	**73089098**
Materiaali / Väri	**Stahl feuerverzinkt, Silber**

Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Lataukset

Alles online

Asennusohje (PDF)
Mittapiirustus (PDF)
Esite (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)