

## LORO-X COMPOSITE BEND 15 DEGREE DN 80

### LORO-Composite Pipe Bend 15 degrees DN 80

#### Tekst za troškovnik

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 15 degrees, DN 80




#### Podaci o artiklu

|                         |                             |
|-------------------------|-----------------------------|
| EAN kod                 | 4038088086391               |
| ETIM klasa              | EC003024                    |
| Nazivni promjer         | DN 80                       |
| Nazivna duljina/stupanj | 15                          |
| Vanjske mjere (VxŠxD)   | 133 x 164 x 239 mm          |
| Težina                  | 2,30 Kg (STK)               |
| Grupa proizvoda         | 3                           |
| Carinski tarifni broj   | 73089098                    |
| Materijal / Boja        | Stahl feuerverzinkt, Silber |

#### Napomena za upotrebu

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

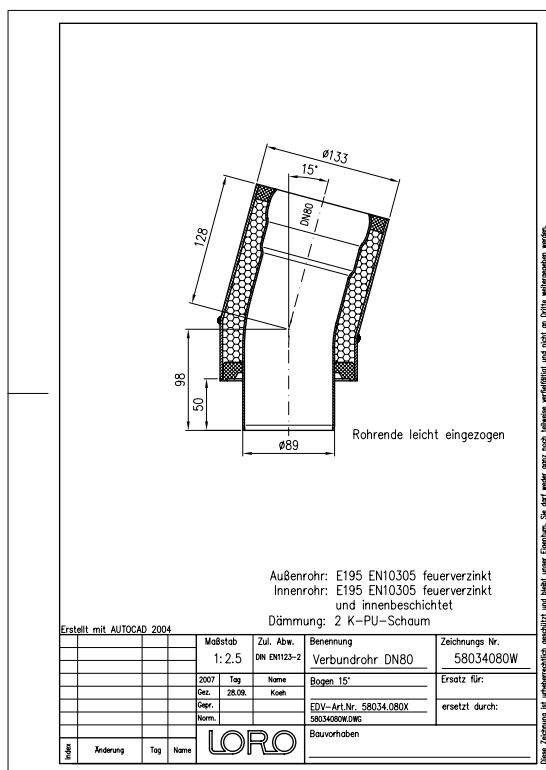

#### Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)