LORO-X COMPOSITE BEND 15 DEGREE DN 125

LORO-Composite Pipe bend 15 degrees DN 125

Opis

LORO-X compound pipe bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 15 degrees, DN125

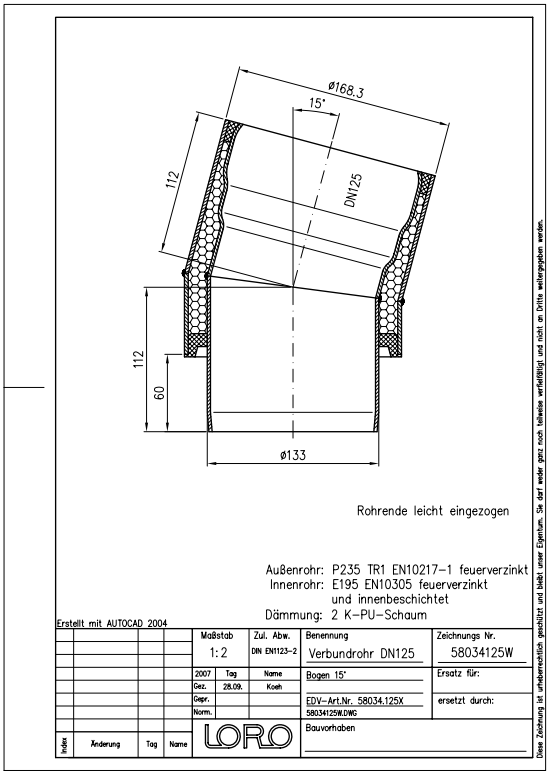

Dane artykułu

Kod EAN	4038088025260
Klasa ETIM	EC003024
Średnica nominalna	DN 125
Długość/stopień nominalny	15
Wymiary zewnętrzne (WxSxD)	168 x 194 x 242 mm
Waga	5,00 Kg (STK)
Grupa produktów	3
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Pobieranie

Alles online

Instrukcja montażu (PDF)
Rysunek wymiarowy (PDF)
Broszura (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)