


**LORO-X COMPOSITE CONNECTING BEND FOR SIPHONIC FLOW 90 DEGREE
DN 70/40**

LORO-Composite Pipe Connection Bend DN 70/40

Opis

LORO-DRAINJET compound pipe connecting bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 90 degrees, DN70/40

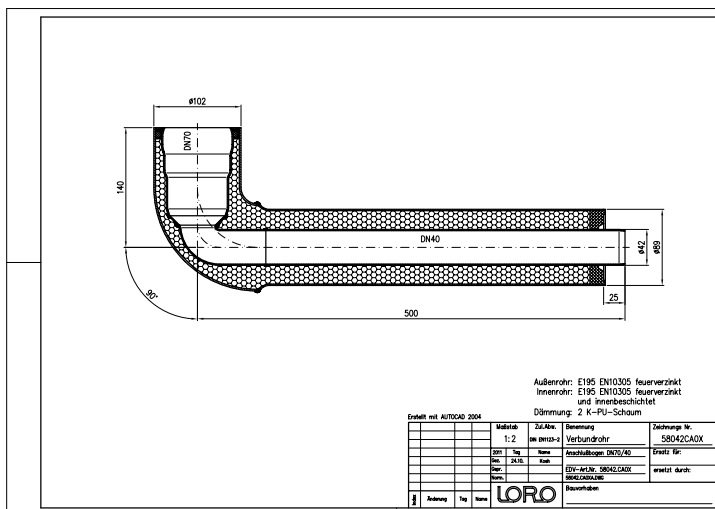

Podatki o izdelku

EAN koda	4038088067079
ETIM razred	EC003024
Nazivni premer	DN 70, DN 40
Nazivna dolžina/stopinja	90
Zunanje mere (VxŠxD)	102 x 185 x 551 mm
Teža	3,80 Kg (STK)
Skupina izdelkov	3
Carinska tarifna številka	73089098
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)

CAD 2D (DXF)

[Merska risba \(PDF\)](#)

CAD (DWG)

[Prospekt \(PDF\)](#)

BIM IFC4 (parametrisch)