


**LORO-X COMPOSITE CONNECTING BEND FOR SIPHONIC FLOW 90 DEGREE
DN 70/40**

LORO-Composite Pipe Connection Bend DN 70/40

Opis

LORO-DRAINJET compound pipe connecting bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 90 degrees, DN70/40

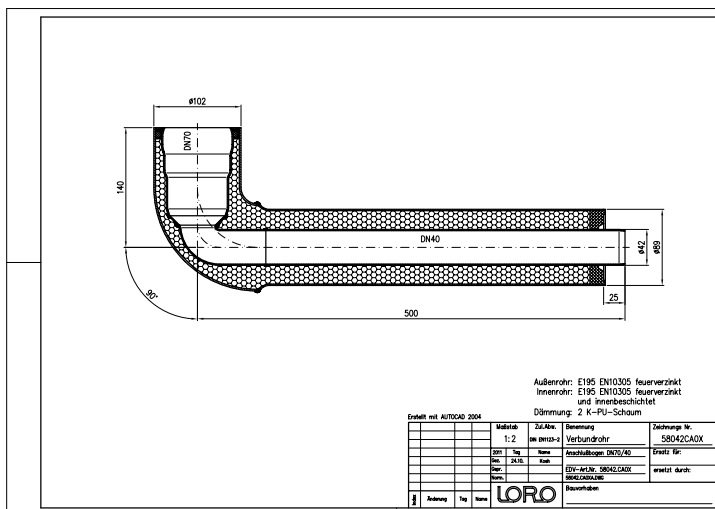

Dane artykułu

Kod EAN	4038088067079
Klasa ETIM	EC003024
Średnica nominalna	DN 70, DN 40
Długość/stożek nominalny	90
Wymiary zewnętrzne (WxSxD)	102 x 185 x 551 mm
Waga	3,80 Kg (STK)
Grupa produktów	3
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

CAD 2D (DXF)

[Rysunek wymiarowy \(PDF\)](#)

CAD (DWG)

[Broszura \(PDF\)](#)

BIM IFC4 (parametrisch)