LORO-X COMPOSITE CONNECTING BEND FOR SIPHONIC FLOW 90 DEGREE DN 70/40

LORO-Composite Pipe Connection Bend DN 70/40

Descripción

LORO-DRAINJET compound pipe connecting bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 90 degrees, DN70/40

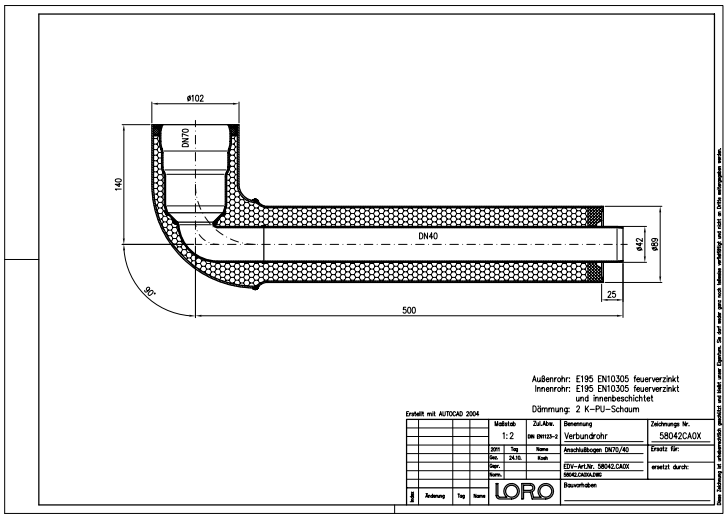

Datos del artículo

Código EAN	**4038088067079**
Clase ETIM	**EC003024**
Diámetro nominal	**DN 70, DN 40**
Longitud/grado nominal	**90**
Medidas exteriores (AxAxL)	**102 x 185 x 551 mm**
Peso	**3,80 Kg (STK)**
Grupo de productos	**3**
Número de arancel aduanero	**73089098**
Material / Color	**Stahl feuerverzinkt, Silber**

Nota de uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Descargas

Alles online

Instrucciones de instalación (PDF)
Dibujo dimensional (PDF)
Folleto (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)