

LORO-X COMPOSITE CONNECTING BEND FOR SIPHONIC FLOW 90 DEGREE DN 70/40

LORO-Composite Pipe Connection Bend DN 70/40

Beskrivelse

LORO-DRAINJET compound pipe connecting bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 90 degrees, DN70/40




Artikkeldata

EAN-kode	4038088067079
ETIM-klasse	EC003024
Nominell diameter	DN 70, DN 40
Nominell lengde/grad	90
Utvendige mål (HxBxL)	102 x 185 x 551 mm
Vekt	3,80 Kg (STK)
Produktgruppe	3
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

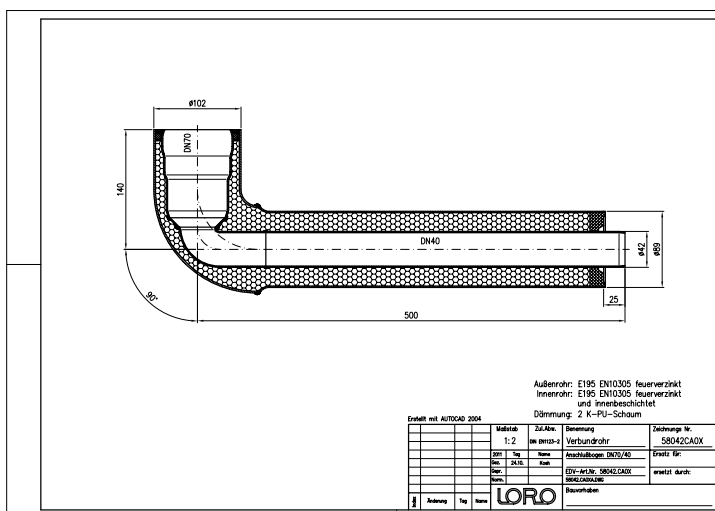

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Måltegning \(PDF\)](#)
[CAD \(DWG\)](#)
[Brosjyre \(PDF\)](#)
[BIM IFC4 \(parametrisk\)](#)