


**LORO-X COMPOSITE CONNECTING BEND FOR SIPHONIC FLOW 90 DEGREE
DN 70/50**

LORO multilayer pipe connection bend DN 70/50

Description

LORO-DRAINJET compound pipe connecting bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 90 degrees, DN70/50

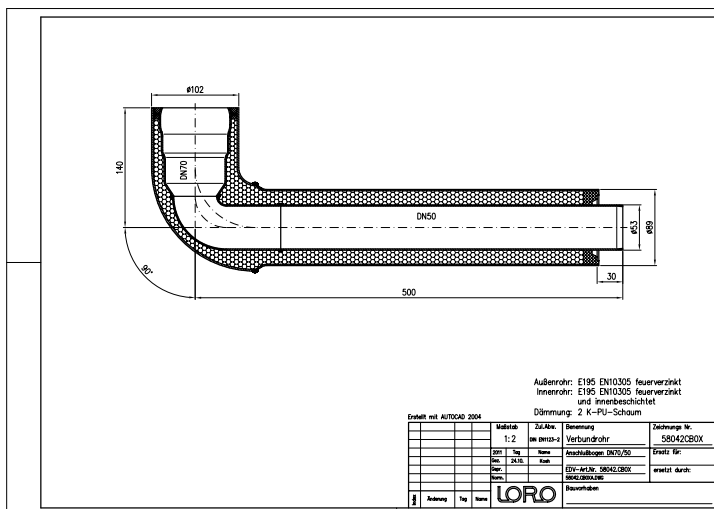

Article information

EAN Code	4038088067062
ETIM Class	EC003024
Nominal diameter	DN 70, DN 50
Nominal length/degree	90
Outside measurements (HxWxL)	102 x 185 x 551 mm
Weight	5,00 Kg (STK)
Product group	3
Customs tariff number	73089098
Material / Color	Stahl feuerverzinkt, Silber

Usage note

kein Verwendungshinweis notwendig

Downloads



Alles online

[Installation \(PDF\)](#)

CAD 2D (DXF)

[CAD drawing \(PDF\)](#)

CAD (DWG)

[Brochure \(PDF\)](#)

BIM IFC4 (parametrisch)