

LORO-X COMPOSITE CONNECTING BEND FOR SIPHONIC FLOW 90 DEGREE DN 70/70

LORO multilayer pipe connection bend DN 70/70

Kuvaus

LORO-DRAINJET compound pipe connecting bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 90 degrees, DN70/70




Tuotetiedot

EAN-koodi	4038088067055
ETIM-luokka	EC003024
Nimellishalkaisija	DN 70, DN 70
Nimellispituus/-aste	90
Ulkomitat (KxLxS)	102 x 191 x 551 mm
Paino	6,00 Kg (STK)
Tuoteryhmä	3
Tullitariffin numero	73089098
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

kein Verwendungshinweis notwendig

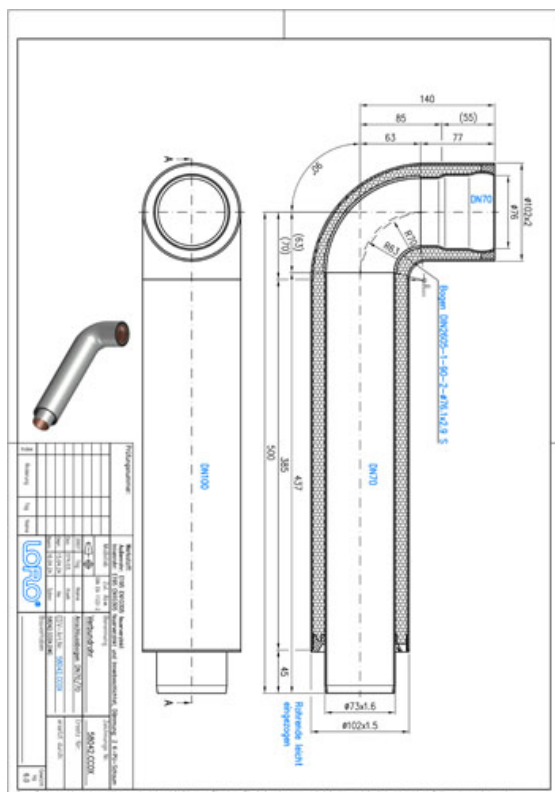

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Esite \(PDF\)](#)

[BIM 3D \(STEP\)](#)