


LORO-X COMPOSITE CONNECTING BEND FOR DN 70/70 SIPHONIC FLOW 90 DEGREE

LORO multilayer pipe connection bend DN 70/70

Description

LORO-DRAINJET compound pipe connecting bend consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 90 degrees, DN70/70

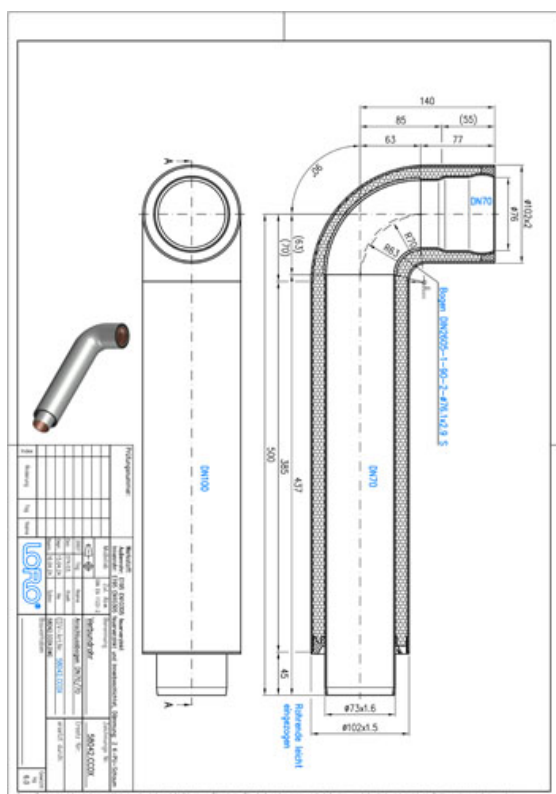

Données de l'article

Code EAN	4038088067055
Classe ETIM	EC003024
Diamètre nominal	DN 70, DN 70
Longueur/degré nominal	90
Dimensions extérieures (HxLxP)	102 x 191 x 551 mm
Poids	6,00 Kg (STK)
Groupe de produits	3
Numéro tarifaire douanier	73089098
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

kein Verwendungshinweis notwendig

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM IFC4 \(parametrisch\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[BIM 3D \(IFC\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)