

LORO-X COMPOSITE PIPE WITH CLEANOUT DN 50

LORO-Composite Pipe with cleaning opening 500 mm DN 50

Popis

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN50




Údaje o artikli

EAN kód	4038088025284
ETIM trieda	EC010323
Menovitý priemer	DN 50
Menovitá dĺžka/stupeň	500
Vonkajšie rozmery (VxŠxH)	109 x 89 x 538 mm
Hmotnosť	3,20 Kg (STK)
Skupina produktov	3
Colný sadzobník	73063012
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

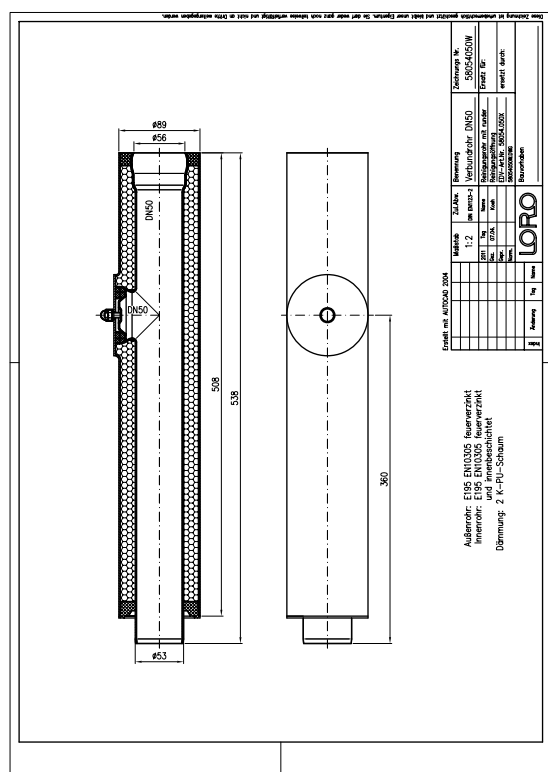

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)