

LORO-X COMPOSITE PIPE WITH CLEANOUT DN 50

LORO-Composite Pipe with cleaning opening 500 mm DN 50

Beschrijving

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN50



Artikelgegevens

EAN-code 4038088025284

ETIM Klasse EC010323

Nominale diameter DN 50

Nominale lengte/graad 500

Buitenafmetingen (HxBxL) 109 x 89 x 538 mm

Gewicht 3,20 Kg (STK)

Productgroep 3


Douanetariefnumme 73063012

r

Materiaal / Kleur Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

kein Verwendungshinweis notwendig

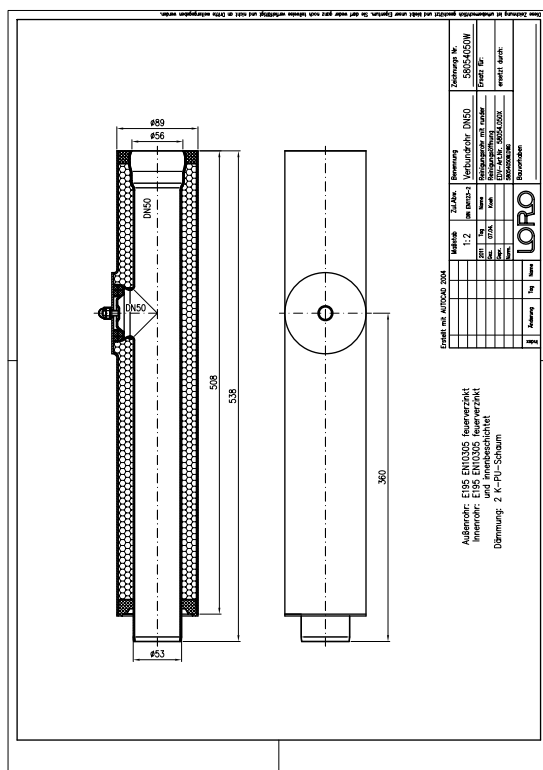

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Maattekening \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)