

## LORO-X COMPOSITE PIPE WITH CLEANOUT DN 50

LORO-Composite Pipe with cleaning opening 500 mm DN 50

### Description

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN50




### Données de l'article

|                                |                             |
|--------------------------------|-----------------------------|
| Code EAN                       | 4038088025284               |
| Classe ETIM                    | EC010323                    |
| Diamètre nominal               | DN 50                       |
| Longueur/degré nominal         | 500                         |
| Dimensions extérieures (HxLxP) | 109 x 89 x 538 mm           |
| Poids                          | 3,20 Kg (STK)               |
| Groupe de produits             | 3                           |
| Numéro tarifaire douanier      | 73063012                    |
| Matériau / Couleur             | Stahl feuerverzinkt, Silber |

### Note d'utilisation

kein Verwendungshinweis notwendig

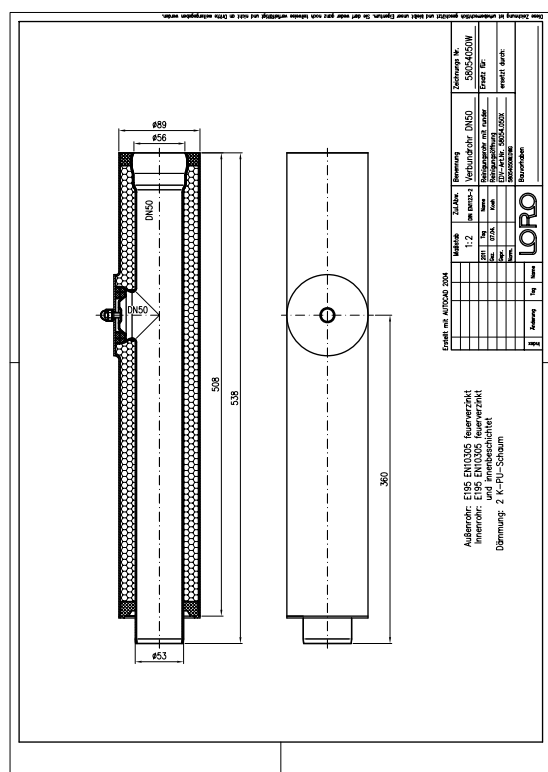

### Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)