

## LORO-X COMPOSITE PIPE WITH CLEANOUT DN 125

LORO multilayer pipe with cleaning opening 500 mm DN 125

### Popis

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN125




### Údaje o artiklu

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088025314               |
| ETIM třída             | EC010323                    |
| Jmenovitý průměr       | DN 125                      |
| Jmenovitá délka/stupeň | 500                         |
| Vnější rozměry (VxŠxD) | 217 x 168 x 575 mm          |
| Hmotnost               | 13,00 Kg (STK)              |
| Skupina produktů       | 3                           |
| Celní sazebník         | 73063018                    |
| Materiál / Barva       | Stahl feuerverzinkt, Silber |

### Pokyny k použití

kein Verwendungshinweis notwendig

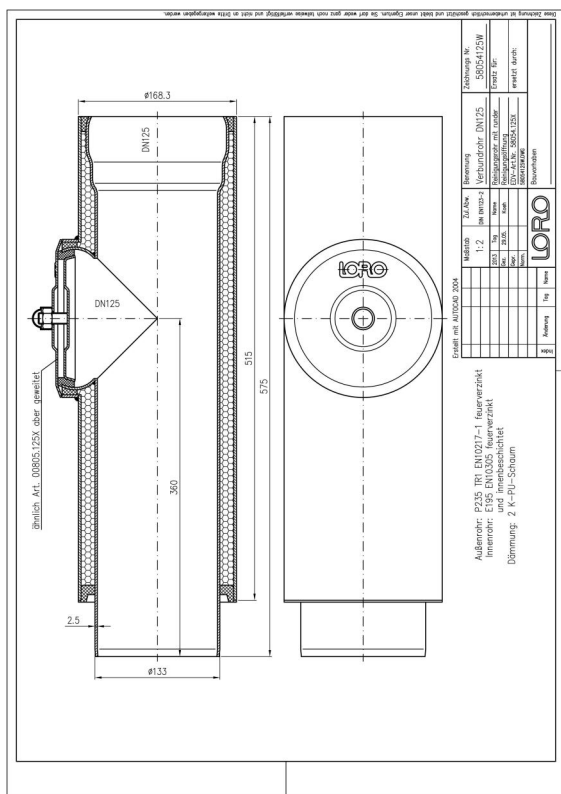

### Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Výkres rozměrů \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)