

LORO-X COMPOSITE PIPE WITH CLEANOUT DN 150

LORO multilayer pipe with cleaning opening 500 mm DN 150

Description

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN150




Article information

EAN Code	4038088025321
ETIM Class	EC010323
Nominal diameter	DN 150
Nominal length/degree	500
Outside measurements (HxWxL)	301 x 219 x 580 mm
Weight	17,00 Kg (STK)
Product group	3
Customs tariff number	73063018
Material / Color	Stahl feuerverzinkt, Silber

Usage note

kein Verwendungshinweis notwendig

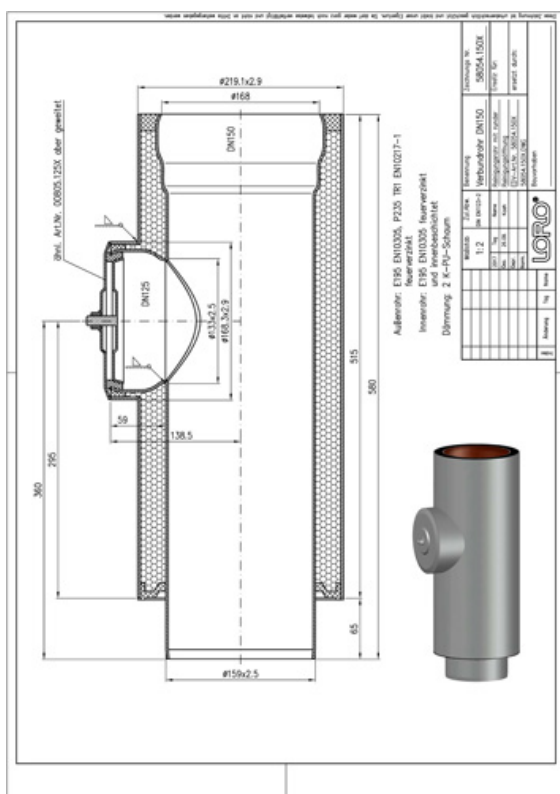

Downloads



Alles online

[Installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[CAD drawing \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM 3D \(STEP\)](#)