LORO-VERBUNDROHR M.R.-ÖFFN.500 MM DN 200

LORO-Composite Pipe with cleaning opening 500 mm DN 200

Beskrivningstext

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN200

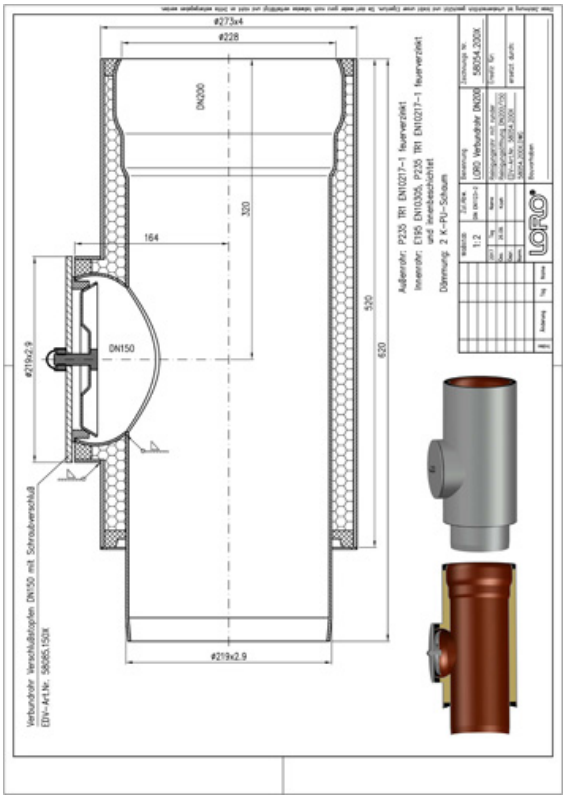

Artikeldata

EAN-kod	4038088086476
ETIM-klass	EC010323
Nominell diameter	DN 200
Nominell längd/grad	500
Yttermått (HxBxL)	331 x 273 x 620 mm
Vikt	23,70 Kg (STK)
Produktgrupp	3
Tullnummer	73063018
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

kein Verwendungshinweis notwendig

Nedladdningar

Alles online

Monteringsanvisning (PDF)
Måttritning (PDF)
Broschyr (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)