LORO-VERBUNDROHR M.R.-ÖFFN.500 MM DN 200

LORO-Composite Pipe with cleaning opening 500 mm DN 200

Text pentru caietul de sarcini

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN200

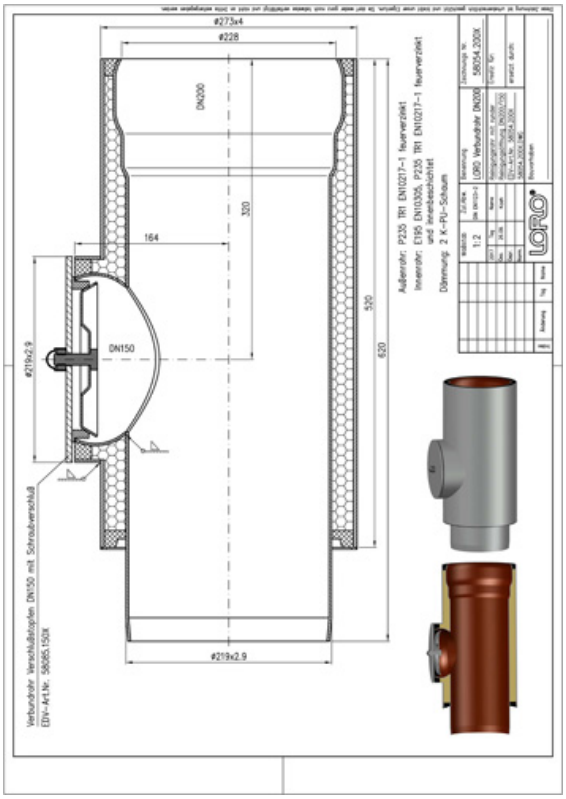

Date articol

Cod EAN	4038088086476
Clasă ETIM	EC010323
Diametru nominal	DN 200
Lungime/grad nominal	500
Dimensiuni exterioare (ÎxLxA)	331 x 273 x 620 mm
Greutate	23,70 Kg (STK)
Grupă de produse	3
Număr tarif vamal	73063018
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

kein Verwendungshinweis notwendig

Descărcări

Alles online

Instrucțiuni de montaj (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Desen CAD (PDF)
CAD 3D (DWG)
Broșură (PDF)
BIM 3D (STEP)