

## LORO-VERBUNDROHR M.R.-ÖFFN.500 MM DN 200

LORO-Composite Pipe with cleaning opening 500 mm DN 200

### Tarjouspyyntöteksti

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN200




### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088086476               |
| ETIM-luokka          | EC010323                    |
| Nimellishalkaisija   | DN 200                      |
| Nimellispituus/-aste | 500                         |
| Ulkomitat (KxLxS)    | 331 x 273 x 620 mm          |
| Paino                | 23,70 Kg (STK)              |
| Tuoteryhmä           | 3                           |
| Tullitariffin numero | 73063018                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

### Käyttöohje

kein Verwendungshinweis notwendig

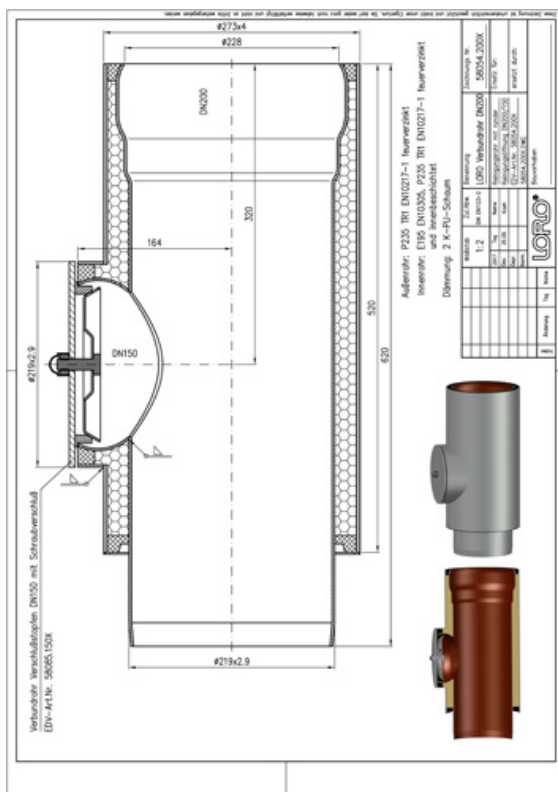

### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Esite \(PDF\)](#)

[BIM 3D \(STEP\)](#)