


LORO-VERBUNDROHR M.R.-ÖFFN.500 MM DN 200

LORO-Composite Pipe with cleaning opening 500 mm DN 200

Text pre výberové konanie

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN200

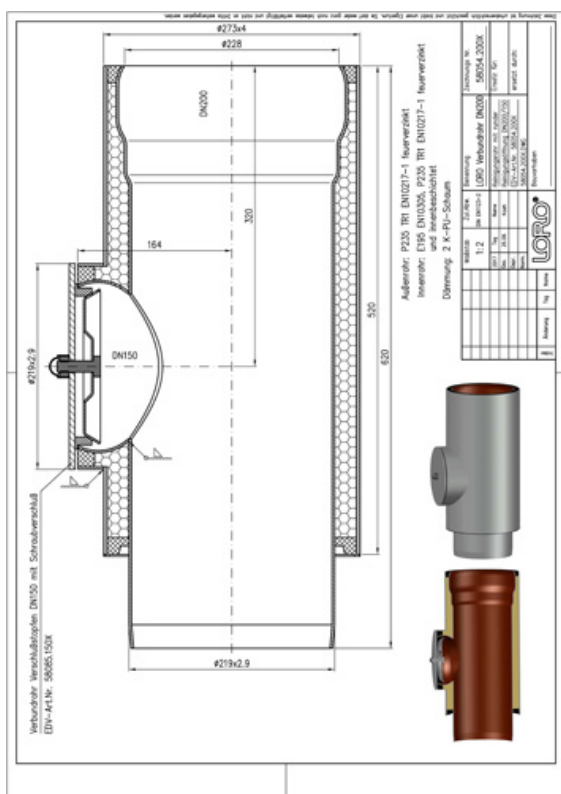

Údaje o artikli

EAN kód	4038088086476
ETIM trieda	EC010323
Menovitý priemer	DN 200
Menovitá dĺžka/stupeň	500
Vonkajšie rozmery (VxŠxH)	331 x 273 x 620 mm
Hmotnosť	23,70 Kg (STK)
Skupina produktov	3
Colný sadzobník	73063018
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

kein Verwendungshinweis notwendig

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)