

LORO-VERBUNDROHR M.R.-ÖFFN.500 MM DN 200

LORO-Composite Pipe with cleaning opening 500 mm DN 200

Texto para caderno de encargos

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN200




Dados do artigo

Código EAN	4038088086476
Classe ETIM	EC010323
Diâmetro nominal	DN 200
Comprimento/grau nominal	500
Medidas exteriores (AxLxP)	331 x 273 x 620 mm
Peso	23,70 Kg (STK)
Grupo de produtos	3
Número de pauta aduaneira	73063018
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

kein Verwendungshinweis notwendig

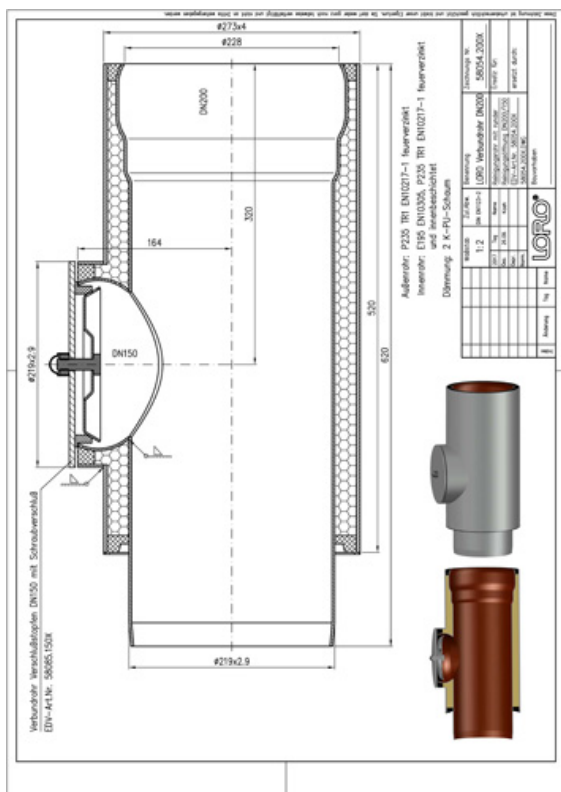

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Desenho cotado \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochura \(PDF\)](#)

[BIM 3D \(STEP\)](#)