LORO-VERBUNDROHR M.R.-ÖFFN.500 MM DN 200

LORO-Composite Pipe with cleaning opening 500 mm DN 200

Bestektekst

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN200

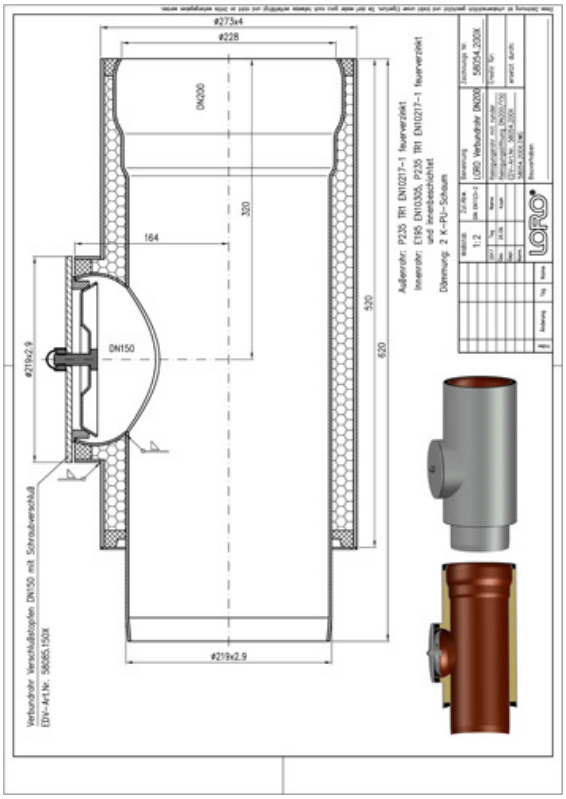

Artikelgegevens

EAN-code	**4038088086476**
ETIM Klasse	**EC010323**
Nominale diameter	**DN 200**
Nominale lengte/graad	**500**
Buitenafmetingen (HxBxL)	**331 x 273 x 620 mm**
Gewicht	**23,70 Kg (STK)**
Productgroep	**3**
Douanetariefnummer	**73063018**
Materiaal / Kleur	**Stahl feuerverzinkt, Silber**

Gebruiksaanwijzing

kein Verwendungshinweis notwendig

Downloads

Alles online

Installatiehandleiding (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Maattekening (PDF)
CAD 3D (DWG)
Brochure (PDF)
BIM 3D (STEP)