

LORO-VERBUNDROHR M.R.-ÖFFN.500 MM DN 200

LORO-Composite Pipe with cleaning opening 500 mm DN 200

Tekst przetargowy

LORO-X compound pipe with clean-out opening (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN200




Dane artykułu

Kod EAN	4038088086476
Klasa ETIM	EC010323
Średnica nominalna	DN 200
Długość/stożek nominalny	500
Wymiary zewnętrzne (WxSxD)	331 x 273 x 620 mm
Waga	23,70 Kg (STK)
Grupa produktów	3
Numer taryfy celnej	73063018
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

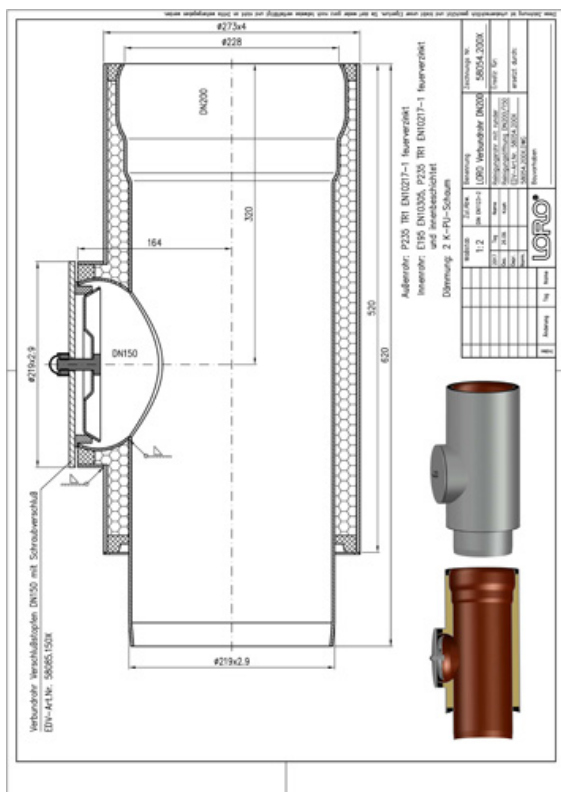

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Broszura \(PDF\)](#)

[BIM 3D \(STEP\)](#)