

## LORO-X COMPOSITE DOUBLE SOCKET DN 125

### LORO-Composite Pipe Double Socket DN 125

#### Περιγραφή

LORO-X compound pipe double socket (projecting), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN125




#### Στοιχεία προϊόντος

|                               |                             |
|-------------------------------|-----------------------------|
| Κωδικός EAN                   | 4038088044575               |
| Κατηγορία ETIM                | EC003024                    |
| Ονομαστική διάμετρος          | DN 125                      |
| Εξωτερικές διαστάσεις (ΥxΠxΜ) | 168 x 168 x 190 mm          |
| Βάρος                         | 4,30 Kg (STK)               |
| Ομάδα προϊόντων               | 3                           |
| Δασμολογικός αριθμός          | 73089098                    |
| Υλικό / Χρώμα                 | Stahl feuerverzinkt, Silber |

#### Σημείωση χρήσης

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

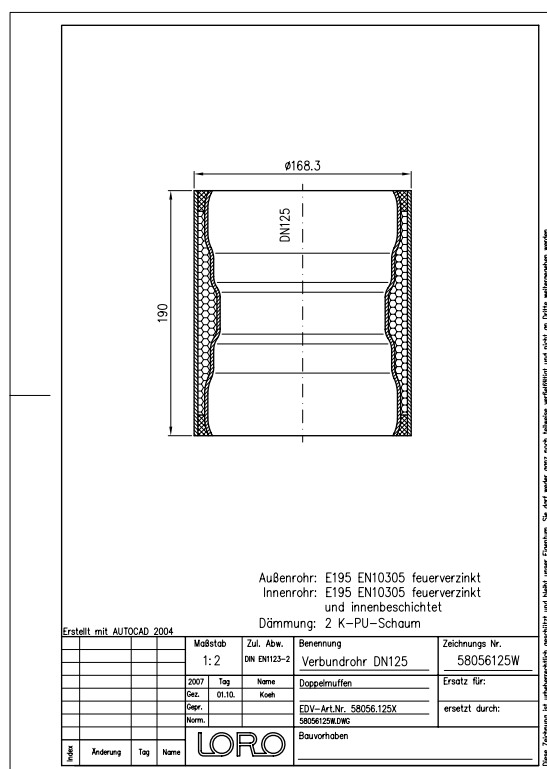

#### Λήψεις



Alles online

[Οδηγίες εγκατάστασης \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Σχέδιο διαστάσεων \(PDF\)](#)  
[CAD \(DWG\)](#)

[Φυλλάδιο \(PDF\)](#)