

LORO-VERBUNDROHR M.R.-ÖFFN.VERS.500 MM,

LORO-Composite Pipe with cleaning opening 500 mm DN 50

Kuvaus

LORO-X compound pipe with clean-out opening (recessed), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN50




Tuotetiedot

EAN-koodi	4038088025390
ETIM-luokka	EC010323
Nimellishalkaisija	DN 50
Nimellispituus/-aste	500
Ulkomitat (KxLxS)	89 x 89 x 500 mm
Paino	3,20 Kg (STK)
Tuoteryhmä	3
Tullitariffin numero	73063012
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

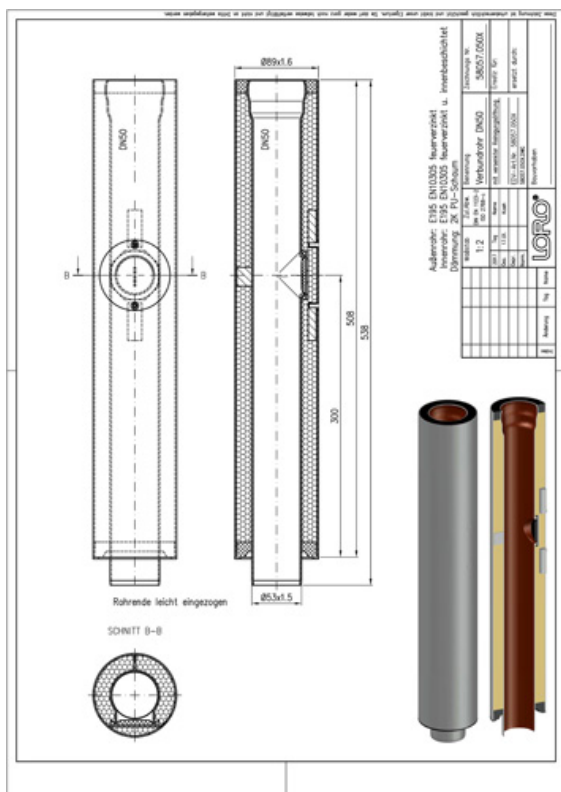

Lataukset



Alles online

[Asennusohje \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Mittapiirustus \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[Esite \(PDF\)](#)
[BIM 3D \(STEP\)](#)