

LORO-VERBUNDROHR M.R.-ÖFFN.VERS.500 MM,

LORO-Composite Pipe with cleaning opening 500 mm DN 50

Περιγραφή

LORO-X compound pipe with clean-out opening (recessed), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN50




Στοιχεία προϊόντος

Κωδικός EAN	4038088025390
Κατηγορία ETIM	EC010323
Ονομαστική διάμετρος	DN 50
Ονομαστικό μήκος/μोίρες	500
Εξωτερικές διαστάσεις (ΥxΠxΜ)	89 x 89 x 500 mm
Βάρος	3,20 Kg (STK)
Ομάδα προϊόντων	3
Δασμολογικός αριθμός	73063012
Υλικό / Χρώμα	Stahl feuerverzinkt, Silber

Σημείωση χρήσης

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

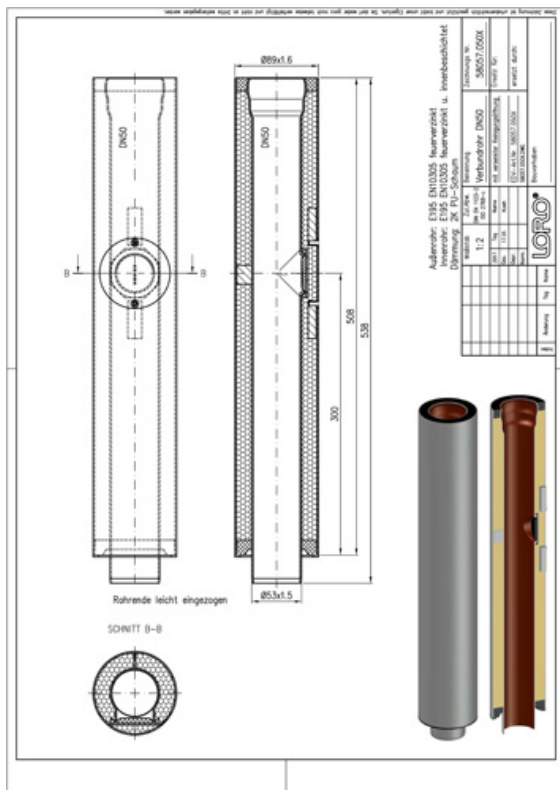

Λήψεις



Alles online

[Οδηγίες εγκατάστασης \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Σχέδιο διαστάσεων \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Φυλλάδιο \(PDF\)](#)

[BIM 3D \(STEP\)](#)