

## LORO-VERBUNDROHR M.R.-ÖFFN.VERS.500 MM,

LORO-Composite Pipe with cleaning opening 500 mm DN 50

### Leírás

LORO-X compound pipe with clean-out opening (recessed), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN50




### Cikkadatok

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088025390               |
| ETIM osztály           | EC010323                    |
| Névleges átmérő        | DN 50                       |
| Névleges hossz/fok     | 500                         |
| Külső méretek (MxSzxH) | 89 x 89 x 500 mm            |
| Súly                   | 3,20 Kg (STK)               |
| Termékcsoport          | 3                           |
| Vámtarifaszám          | 73063012                    |
| Anyag / Szín           | Stahl feuerverzinkt, Silber |

### Használati megjegyzés

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

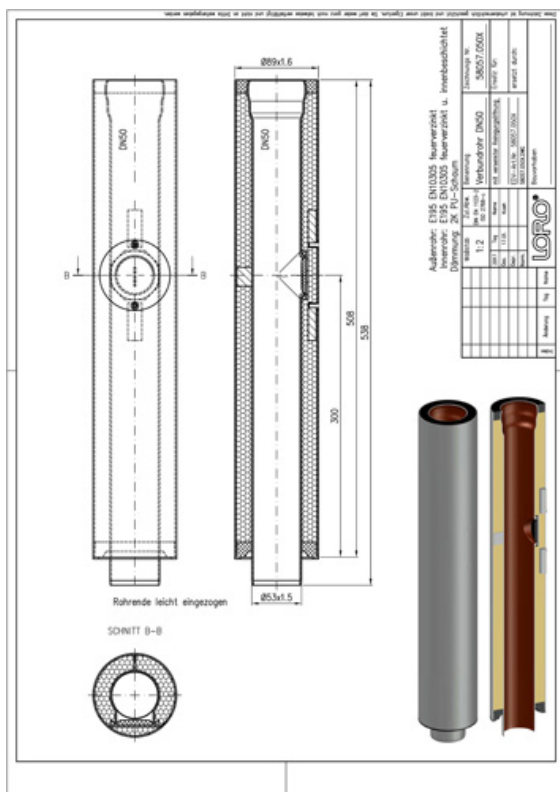

### Letöltések



Alles online

[Szerelési útmutató \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Méterrajz \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospektus \(PDF\)](#)

[BIM 3D \(STEP\)](#)