

LORO-VERBUNDROHR M.R.-ÖFFN.VERS.500 MM,

LORO-Composite Pipe with cleaning opening 500 mm DN 70

Beschrijving

LORO-X compound pipe with clean-out opening (recessed), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN70



Artikelgegevens

EAN-code 4038088025406

ETIM Klasse EC010323

Nominale diameter DN 70

Nominale lengte/graad 500

Buitenafmetingen (HxBxL) 102 x 102 x 555 mm

Gewicht 5,00 Kg (STK)

Productgroep 3


Douanetariefnumme 73063012

r

Materiaal / Kleur Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

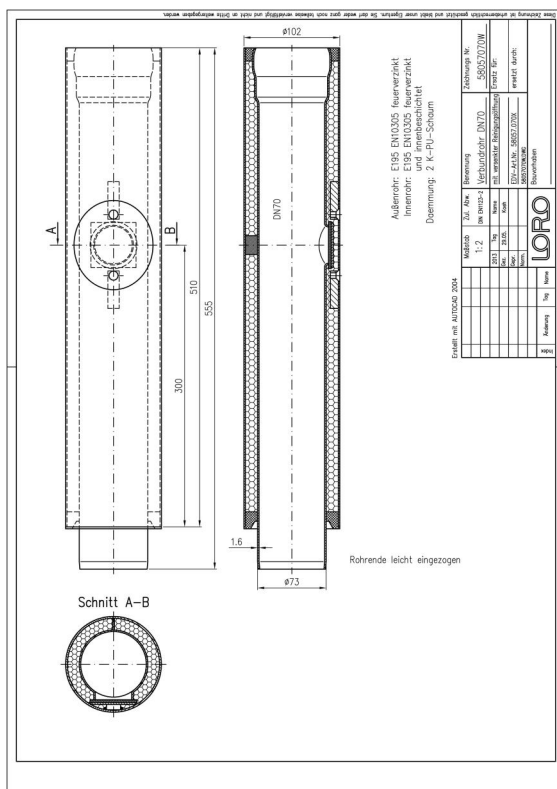

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Maattekening \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)