


LORO-VERBUNDROHR M.R.-ÖFFN.VERS.500 MM,

LORO multilayer pipe with cleaning opening 500 mm DN 125

Popis

LORO-X compound pipe with clean-out opening (recessed), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN125

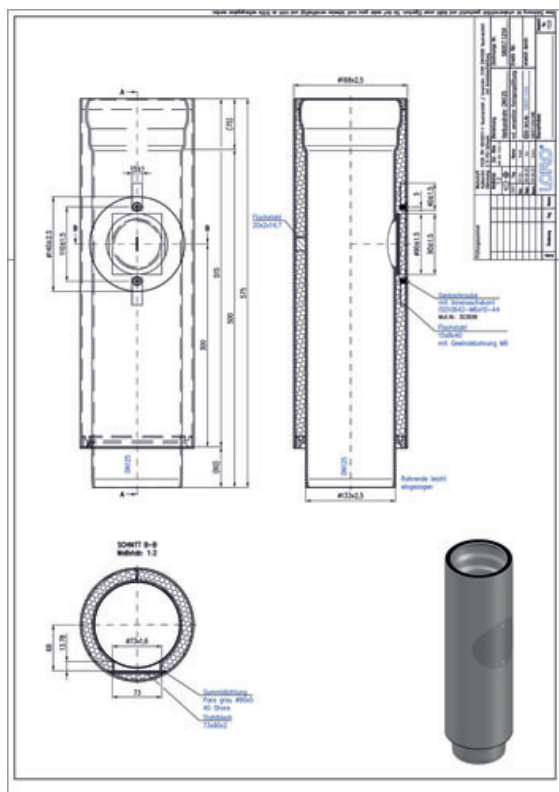

Údaje o artikli

EAN kód	4038088025420
ETIM trieda	EC010323
Menovitý priemer	DN 125
Menovitá dĺžka/stupeň	500
Vonkajšie rozmery (VxŠxH)	168 x 168 x 575 mm
Hmotnosť	13,00 Kg (STK)
Skupina produktov	3
Colný sadzobník	73063018
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Rozmerový výkres \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM 3D \(STEP\)](#)