

LORO-VERBUNDROHR M.R.-ÖFFN.VERS.500 MM,

LORO multilayer pipe with cleaning opening 500 mm DN 125

Beskrivelse

LORO-X compound pipe with clean-out opening (recessed), consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 500 mm, DN125




Artikeldata

EAN-kode	4038088025420
ETIM Klasse	EC010323
Nominel diameter	DN 125
Nominel længde/grad	500
Ydermål (HxBxL)	168 x 168 x 575 mm
Vægt	13,00 Kg (STK)
Produktgruppe	3
Toldtarifnummer	73063018
Materiale / Farve	Stahl feuerverzinkt, Silber

Brugsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

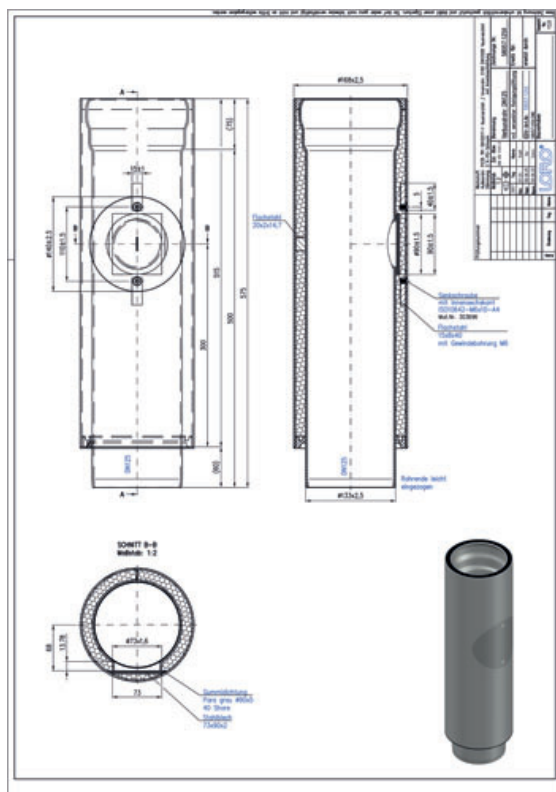

Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Måltegning \(PDF\)](#)

CAD 3D (DWG)

[Brochure \(PDF\)](#)

BIM 3D (STEP)