LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 40/50

LORO-Composite transition pipe

Текст за тръжна документация

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN40/50

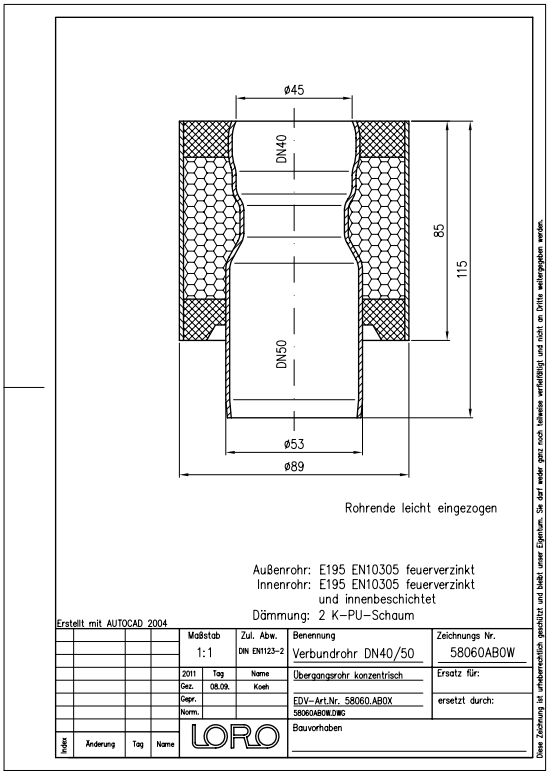

Данни за артикула

EAN код	**4038088049570**
ETIM клас	**EC003024**
Номинален диаметър	**DN 40, DN 50**
Външни размери (ВхШхД)	**115 x 89 x 89 mm**
Тегло	**0,50 Kg (STK)**
Продуктова група	**3**
Митнически тарифен номер	**73089098**
Материал / Цвят	**Stahl feuerverzinkt, Silber**

Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Изтегляния

Alles online

Инструкция за монтаж (PDF)
CAD 2D (DXF)
CAD чертеж (PDF)
CAD (DWG)
Брошура (PDF)