# LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 40/70

**LORO-Composite transition pipe**

## Text pentru caietul de sarcini

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN40/70

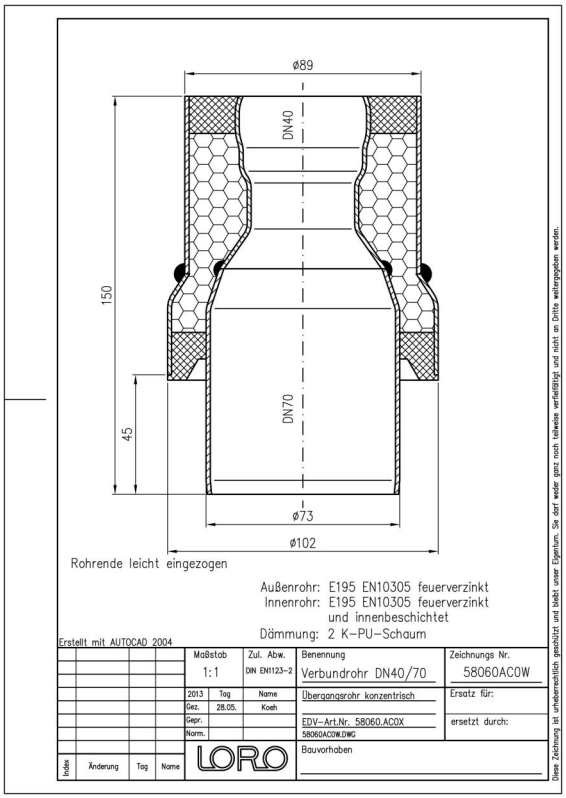


## Date articol

| | |
|---|---|
| **Cod EAN** | **4038088049587** |
| **Clasă ETIM** | **EC003024** |
| **Diametru nominal** | **DN 40, DN 70** |
| **Dimensiuni exterioare (ÎxLxA)** | **150 x 102 x 102 mm** |
| **Greutate** | **0,70 Kg (STK)** |
| **Grupă de produse** | **3** |
| **Număr tarif vamal** | **73089098** |
| **Material / Culoare** | **Stahl feuerverzinkt, Silber** |

## Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

## Descărcări

Alles online

Instrucțiuni de montaj (PDF)
CAD 2D (DXF)
Desen CAD (PDF)
CAD (DWG)
Broșură (PDF)