

LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 70/80

LORO-Composite transition pipe

Text pre výberové konanie

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN70/80




Údaje o artikli

EAN kód	4038088049594
ETIM trieda	EC003024
Menovitý priemer	DN 70, DN 80
Vonkajšie rozmery (VxŠxH)	133 x 133 x 185 mm
Hmotnosť	1,50 Kg (STK)
Skupina produktov	3
Colný sadzobník	73089098
Materiál / Farba	Stahl feuerverzinkt, Silber

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

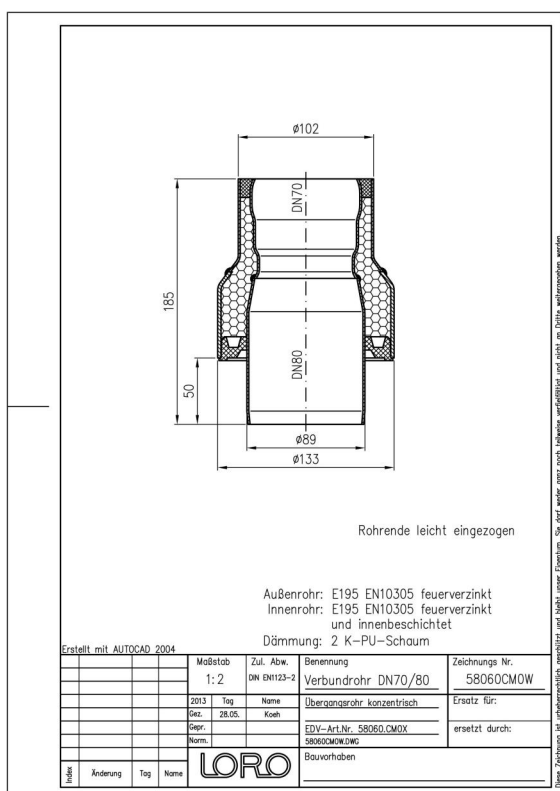

Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)