

## LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 100/125

### LORO-Composite transition pipe DN 100/125

#### Descriere

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN100/125




#### Date articol

|                                  |                             |
|----------------------------------|-----------------------------|
| Cod EAN                          | 4038088025512               |
| Clasă ETIM                       | EC003024                    |
| Diametru nominal                 | DN 100, DN 125              |
| Dimensiuni<br>exterioare (ÎxLxA) | 168 x 168 x 230 mm          |
| Greutate                         | 3,70 Kg (STK)               |
| Grupă de produse                 | 3                           |
| Număr tarif vamal                | 73089098                    |
| Material / Culoare               | Stahl feuerverzinkt, Silber |

#### Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

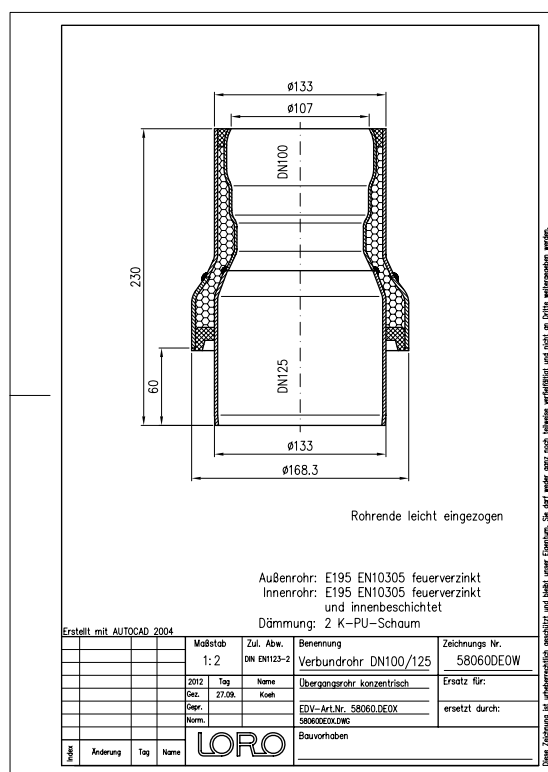

#### Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)  
[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)