

LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 125/150

LORO-Composite transition pipe DN 125/150

Leírás

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN125/150




Cikkadatok

EAN kód	4038088025529
ETIM osztály	EC003024
Névleges átmérő	DN 125, DN 150
Külső méretek (MxSzxH)	219 x 219 x 225 mm
Súly	5,10 Kg (STK)
Termékcsoport	3
Vámtarifaszám	73089098
Anyag / Szín	Stahl feuerverzinkt, Silber

Használati megjegyzés

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

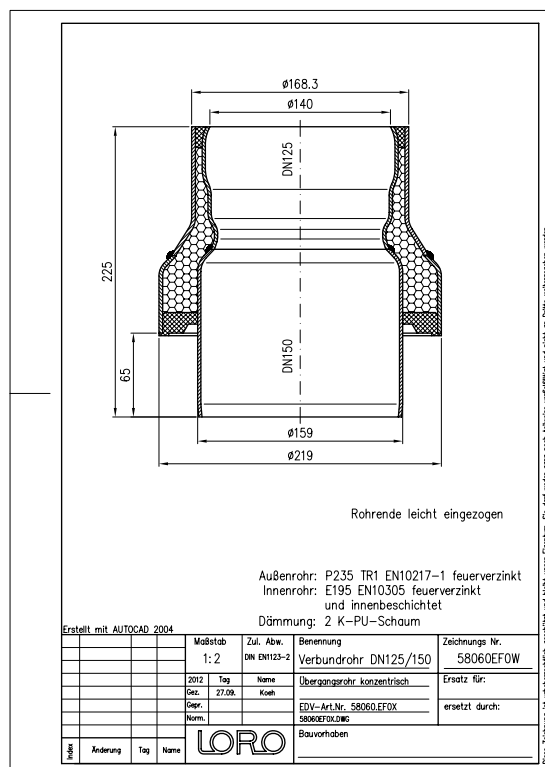

Letöltések



Alles online

[Szerelési útmutató \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Méreterajz \(PDF\)](#)
[CAD \(DWG\)](#)

[Prospektus \(PDF\)](#)