LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 150/200

LORO-Composite transition pipe

Kiírási szöveg

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN150/200



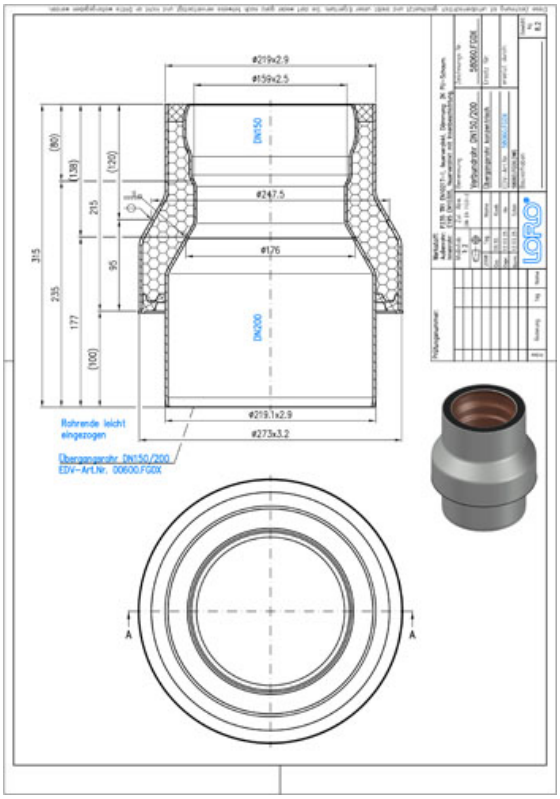

Cikkadatok

EAN kód	**4038088038215**
ETIM osztály	**EC003024**
Névleges átmérő	**DN 150, DN 200**
Külső méretek (MxSzxH)	**273 x 273 x 315 mm**
Súly	**8,20 Kg (STK)**
Termékcsoport	**3**
Vámtarifaszám	**73089098**
Anyag / Szín	**Stahl feuerverzinkt, Silber**

Használati megjegyzés

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Letöltések

Alles online

Szerelési útmutató (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Méretrajz (PDF)
CAD 3D (DWG)
Prospektus (PDF)
BIM 3D (STEP)