

LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 150/200

LORO-Composite transition pipe

Tekst przetargowy

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN150/200




Dane artykułu

Kod EAN	4038088038215
Klasa ETIM	EC003024
Średnica nominalna	DN 150, DN 200
Wymiary zewnętrzne (WxSxD)	273 x 273 x 315 mm
Waga	8,20 Kg (STK)
Grupa produktów	3
Numer taryfy celnej	73089098
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

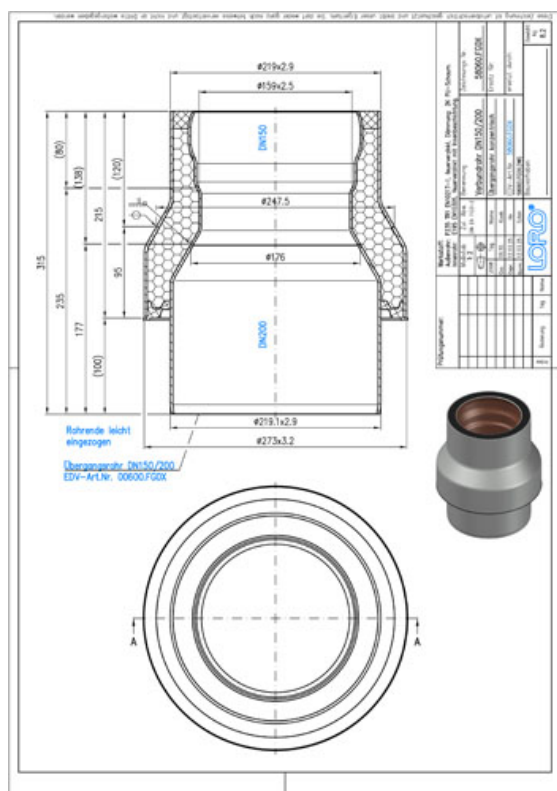

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Rysunek wymiarowy \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[Broszura \(PDF\)](#)
[BIM 3D \(STEP\)](#)