


LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 32/50

LORO-Composite pipe transition piece DN 32/ 50

Text pentru caietul de sarcini

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN32/50

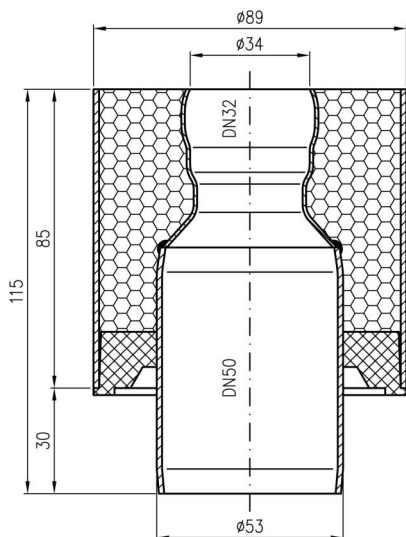

Außenrohr: E195 EN10305 feuerverzinkt
Innenrohr: E195 EN10305 feuerverzinkt
und innenbeschichtet
Dämmung: 2 K-PU-Schaum

Erstellt mit AUTOCAD 2004

Maßstab	1:1	Zul. Abw.	DIN EN1123-2	Benennung	Verbundrohr DN32/50	Zeichnungs Nr.	58060LB0W
2013	Tag	Name		Übergangsrohr konzentrisch		Ersatz für:	
Gez.	10.04.	Koeh		EDV-Art.Nr. 58060.LB0X		ersetzt durch:	
Gepr.				58060.LB0W.DWG			
Norm.				Bauvorhaben			
Index	Änderung	Tag	Name				

Date articol

Cod EAN 4038088067307

Clasă ETIM EC003024

Diametru nominal DN 32, DN 50

Dimensiuni
exterioare (ÎxLxA) 89 x 89 x 115 mm

Greutate 0,50 Kg (STK)

Grupă de produse 3

Număr tarif vamal 73089098

Material / Culoare Stahl feuerverzinkt, Silber

Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Desen CAD \(PDF\)](#)
[CAD \(DWG\)](#)
[Broșură \(PDF\)](#)