


LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 32/50

LORO-Composite pipe transition piece DN 32/ 50

Текст за тръжна документация

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN32/50

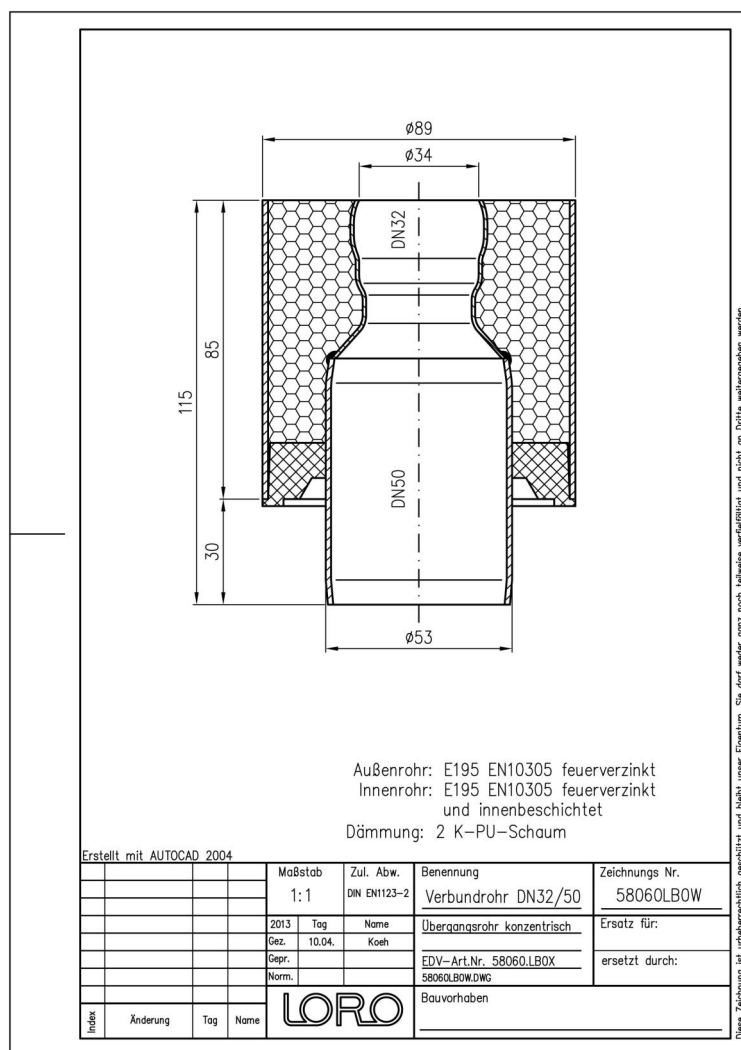

Данни за артикула

ЕАН код	4038088067307
ЕТИМ клас	EC003024
Номинален диаметър	DN 32, DN 50
Външни размери (ВxШxД)	89 x 89 x 115 mm
Тегло	0,50 Kg (STK)
Продуктова група	3
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)