LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 32/50

LORO-Composite pipe transition piece DN 32/ 50

Κείμενο προδιαγραφών

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN32/50

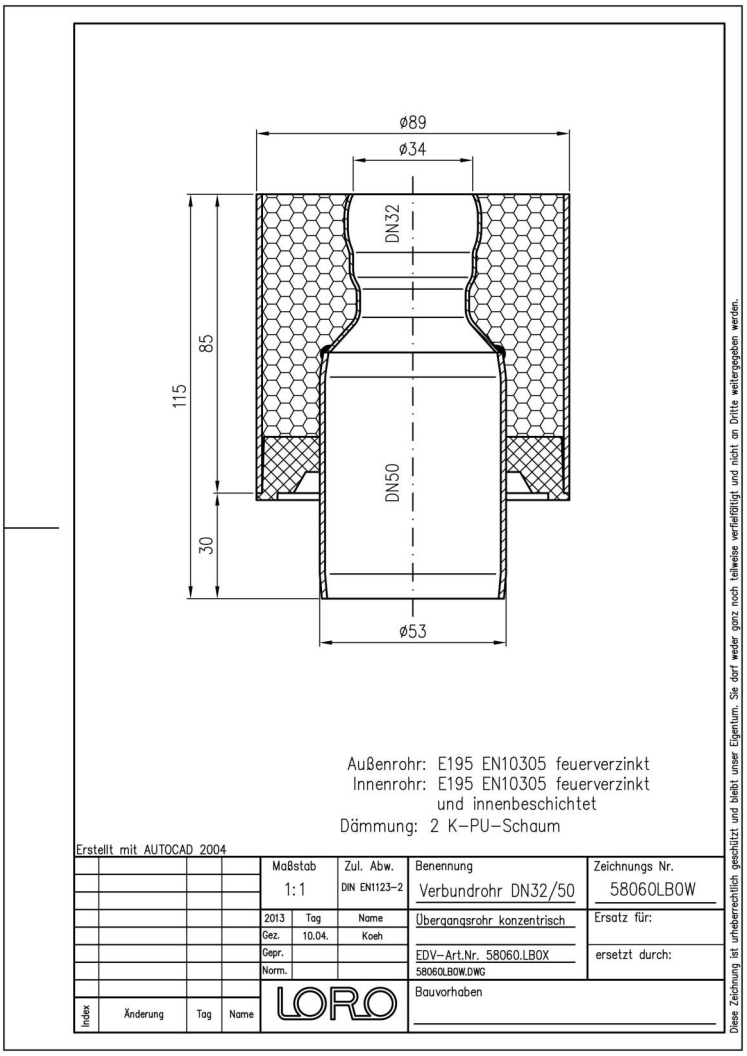

Στοιχεία προϊόντος

Κωδικός EAN	**4038088067307**
Κατηγορία ETIM	**EC003024**
Ονομαστική διάμετρος	**DN 32, DN 50**
Εξωτερικές διαστάσεις (ΥxΠxΜ)	**89 x 89 x 115 mm**
Βάρος	**0,50 Kg (STK)**
Ομάδα προϊόντων	**3**
Δασμολογικός αριθμός	**73089098**
Υλικό / Χρώμα	**Stahl feuerverzinkt, Silber**

Σημείωση χρήσης

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Λήψεις

Alles online

Οδηγίες εγκατάστασης (PDF)
CAD 2D (DXF)
Σχέδιο διαστάσεων (PDF)
CAD (DWG)
Φυλλάδιο (PDF)