


LORO-X COMPOSITE TRANSITION PIPE CONCENTR DN 32/50

LORO-Composite pipe transition piece DN 32/ 50

Tekst za troškovnik

LORO-X compound pipe transition pipe (concentric reducer) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN32/50

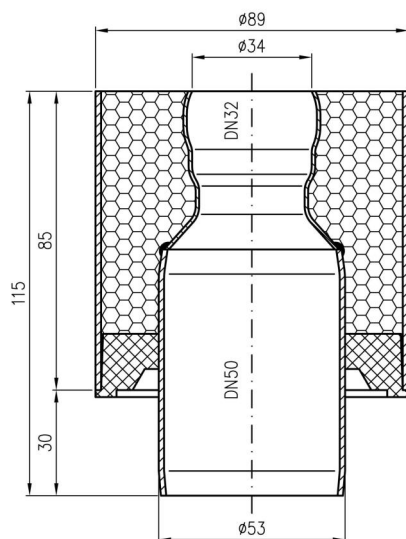

Außenrohr: E195 EN10305 feuerverzinkt
Innenrohr: E195 EN10305 feuerverzinkt
und innenbeschichtet
Dämmung: 2 K-PU-Schaum

Erstellt mit AUTOCAD 2004

Maßstab	Zul. Abw.	Benennung	Zeichnungs Nr.
1:1	DIN EN1123-2	Verbundrohr DN32/50	58060LB0W
2013	Tag	Name	Übergangsrohr konzentrisch
Gez.	10.04.	Koeh	Ersatz für:
Gepr.			ersetzt durch:
Norm.			EDV-Art.Nr. 58060.LB0X
			58060.LB0W.DWG
			Bauvorhaben



Podaci o artiklu

EAN kod 4038088067307

ETIM klasa EC003024

Nazivni promjer DN 32, DN 50

Vanjske mjere 89 x 89 x 115 mm
(VxŠxD)

Težina 0,50 Kg (STK)

Grupa proizvoda 3

Carinski tarifni broj 73089098

Materijal / Boja Stahl feuerverzinkt, Silber

Napomena za upotrebu

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Dimenzijski crtež \(PDF\)](#)
[CAD \(DWG\)](#)
[Prospekt \(PDF\)](#)