

## LORO-VERBUND-ANSCHLUßST.AN KA-ROHR,

LORO-Connection piece to KA-pipe DN 100

### Descriere

LORO-X compound pipe connector (from KA pipe/SML pipe to LORO-X socket) consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), DN100




### Date articol

|                               |                             |
|-------------------------------|-----------------------------|
| Cod EAN                       | 4038088035085               |
| Clasă ETIM                    | EC003024                    |
| Diametru nominal              | DN 100                      |
| Dimensiuni exterioare (ÎxLxA) | 133 x 133 x 180 mm          |
| Greutate                      | 2,20 Kg (STK)               |
| Grupă de produse              | 3                           |
| Număr tarif vamal             | 73089098                    |
| Material / Culoare            | Stahl feuerverzinkt, Silber |

### Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

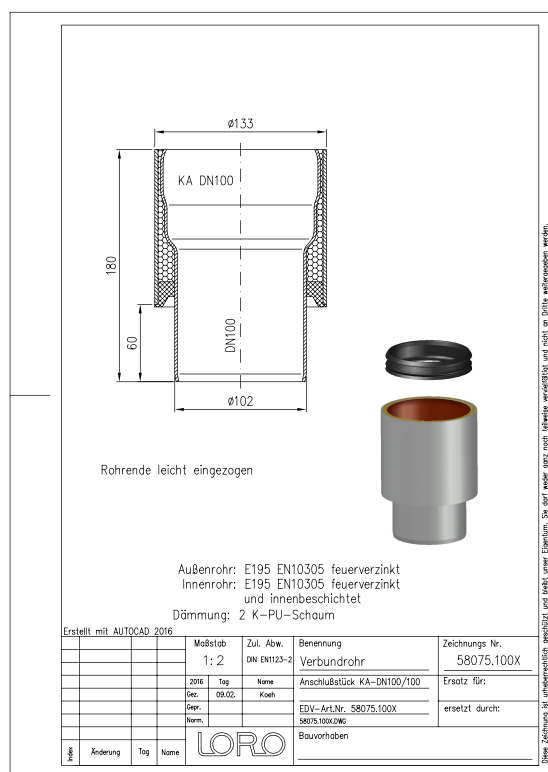

### Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Desen CAD \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Broșură \(PDF\)](#)

[BIM 3D \(STEP\)](#)