# LX-VERBUNDROHR M. BEGLEITHEIZUNG DN70 30

**LORO multilayer pipe with trace heating**

## Text pentru caietul de sarcini

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN70, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

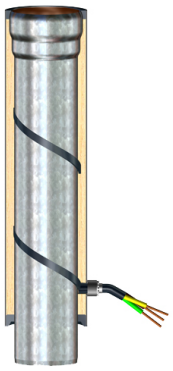

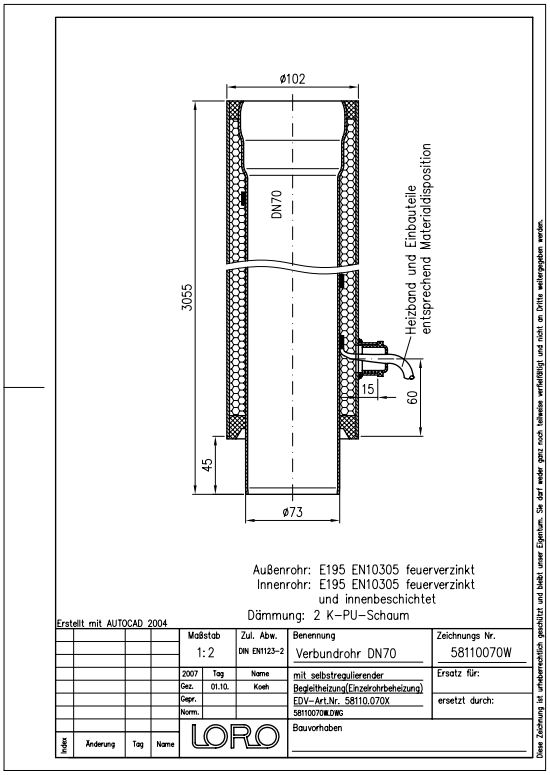


## Date articol

| | |
|---|---|
| Cod EAN | **4038088039335** |
| Clasă ETIM | **EC010225** |
| Diametru nominal | **DN 70** |
| Lungime/grad nominal | **3000** |
| Dimensiuni exterioare (ÎxLxA) | **125 x 102 x 3055 mm** |
| Greutate | **27,60 Kg (STK)** |
| Grupă de produse | **3** |
| Număr tarif vamal | **73063012** |
| Material / Culoare | **Stahl feuerverzinkt, Silber** |

## Notă de utilizare

kein Verwendungshinweis notwendig

## Descărcări

Alles online

Desen CAD (PDF)
CAD (DWG)
Broșură (PDF)
CAD 2D (DXF)