


LX-VERBUNDROHR M. BEGLEITHEIZUNG DN100 3

LORO multilayer pipe with trace heating

Tekst za troškovnik

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN100, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

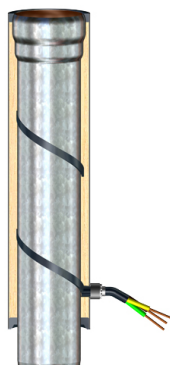


Podaci o artiklu

EAN kod	4038088039342
ETIM klasa	EC010225
Nazivni promjer	DN 100
Nazivna duljina/stupanj	3000
Vanjske mjere (VxŠxD)	156 x 133 x 3070 mm
Težina	44,60 Kg (STK)
Grupa proizvoda	3
Carinski tarifni broj	73063012
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

kein Verwendungshinweis notwendig

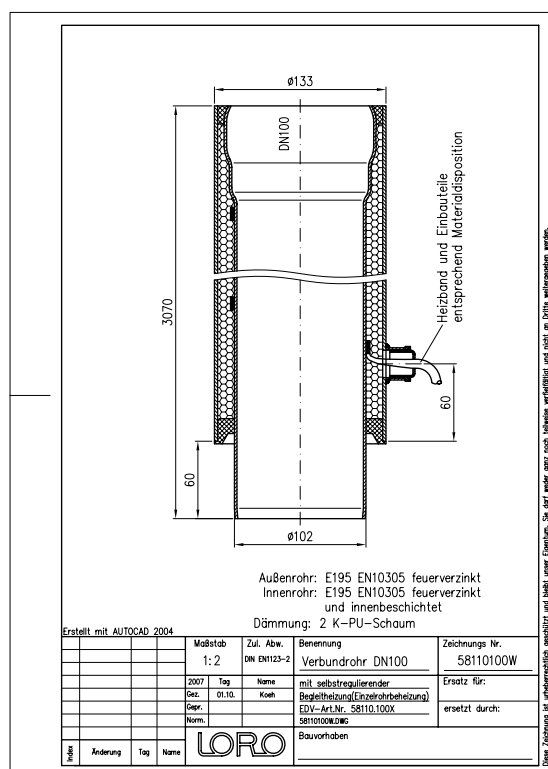

Preuzimanja



Alles online

[Dimenzijski crtež \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)

[CAD 2D \(DXF\)](#)