


## LX-VERBUNDROHR M. BEGLEITHEIZUNG DN100 3

LORO multilayer pipe with trace heating

### Texto de licitación

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN100, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

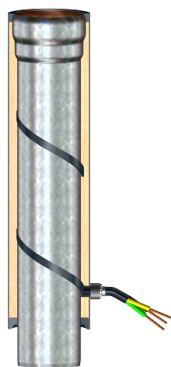


### Datos del artículo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088039342               |
| Clase ETIM                 | EC010225                    |
| Diámetro nominal           | DN 100                      |
| Longitud/grado nominal     | 3000                        |
| Medidas exteriores (AxAxL) | 156 x 133 x 3070 mm         |
| Peso                       | 44,60 Kg (STK)              |
| Grupo de productos         | 3                           |
| Número de arancel aduanero | 73063012                    |
| Material / Color           | Stahl feuerverzinkt, Silber |

### Nota de uso

kein Verwendungshinweis notwendig

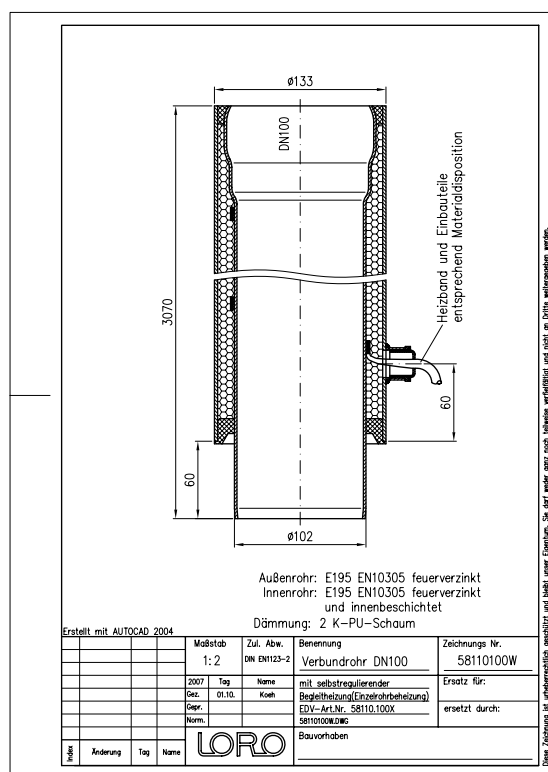

### Descargas



Alles online

[Dibujo dimensional \(PDF\)](#)

[CAD \(DWG\)](#)

[Folleto \(PDF\)](#)

[CAD 2D \(DXF\)](#)