


## LX-VERBUNDROHR M. BEGLEITHEIZUNG DN125 3

LORO multilayer pipe with trace heating

### Udbudstekst

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN125, with self-regulating trace heating with connecting cable 3 x 1.5 mm<sup>2</sup>, cable length ca. 1 m

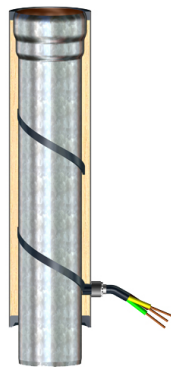


### Artikeldata

|                        |                             |
|------------------------|-----------------------------|
| EAN-kode               | 4038088039359               |
| ETIM Klasse            | EC010225                    |
| Nominel diameter       | DN 125                      |
| Nominel<br>længde/grad | 3000                        |
| Ydermål (HxBxL)        | 191 x 168 x 3075 mm         |
| Vægt                   | 70,60 Kg (STK)              |
| Produktgruppe          | 3                           |
| Toldtarifnummer        | 73063018                    |
| Materiale / Farve      | Stahl feuerverzinkt, Silber |

### Brugsanvisning

kein Verwendungshinweis notwendig

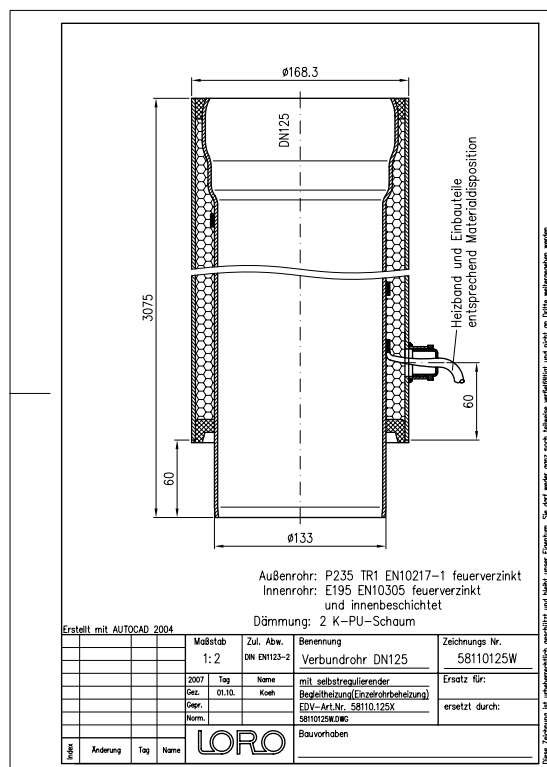

### Downloads



Alles online

[Måltegning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[CAD 2D \(DXF\)](#)