


## LX-VERBUNDROHR M. BEGLEITHEIZUNG DN125 3

LORO multilayer pipe with trace heating

### Tekst przetargowy

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN125, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

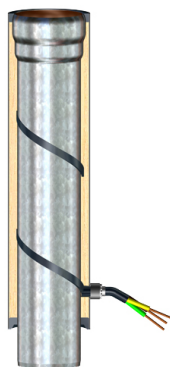


### Dane artykułu

|                            |                             |
|----------------------------|-----------------------------|
| Kod EAN                    | 4038088039359               |
| Klasa ETIM                 | EC010225                    |
| Średnica nominalna         | DN 125                      |
| Długość/stożek nominalny   | 3000                        |
| Wymiary zewnętrzne (WxSxD) | 191 x 168 x 3075 mm         |
| Waga                       | 70,60 Kg (STK)              |
| Grupa produktów            | 3                           |
| Numer taryfy celnej        | 73063018                    |
| Materiał / Kolor           | Stahl feuerverzinkt, Silber |

### Wskazówki dotyczące użytkowania

kein Verwendungshinweis notwendig

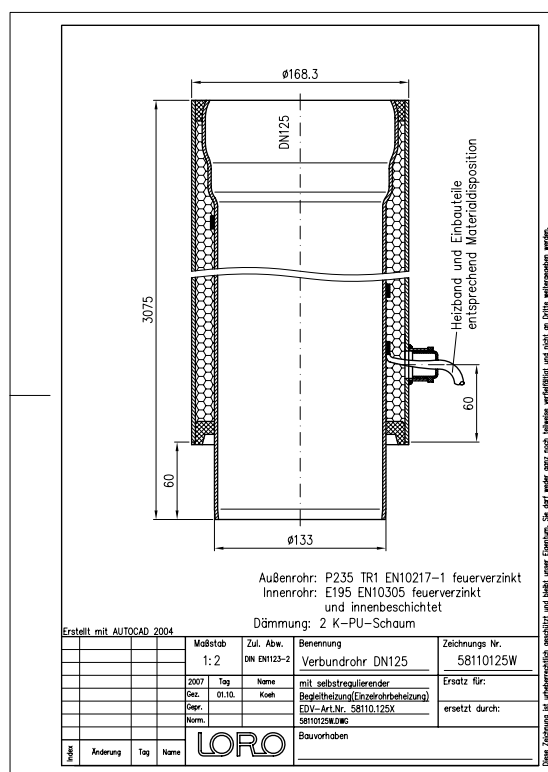

### Pobieranie



Alles online

[Rysunek wymiarowy \(PDF\)](#)

[CAD \(DWG\)](#)

[Broszura \(PDF\)](#)

[CAD 2D \(DXF\)](#)