Scheda tecnica del prodotto

LORO_Produkt-Datenblatt_58110.125X_it.pdf
Articolo 58110.125X
29.10.2026, 18:03

LX-VERBUNDROHR M. BEGLEITHEIZUNG DN125 3

LORO multilayer pipe with trace heating

Voce di capitolato

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN125, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

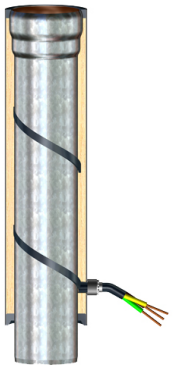

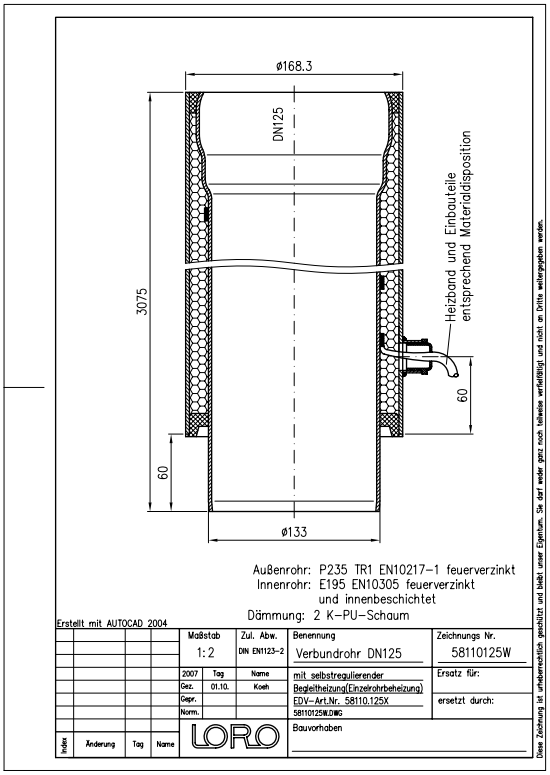

Dati articolo

Codice EAN	**4038088039359**
Classe ETIM	**EC010225**
Diametro nominale	**DN 125**
Lunghezza/grado nominale	**3000**
Misure esterne (AxLxP)	**191 x 168 x 3075 mm**
Peso	**70,60 Kg (STK)**
Gruppo prodotti	**3**
Numero tariffa doganale	**73063018**
Materiale / Colore	**Stahl feuerverzinkt, Silber**

Note d'uso

kein Verwendungshinweis notwendig

Download

Alles online

Disegno dimensionale (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD (DWG)