LX-VERBUNDROHR M. BEGLEITHEIZUNG DN150 3

LORO multilayer pipe with trace heating

Text pentru caietul de sarcini

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN150, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

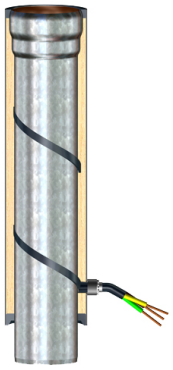

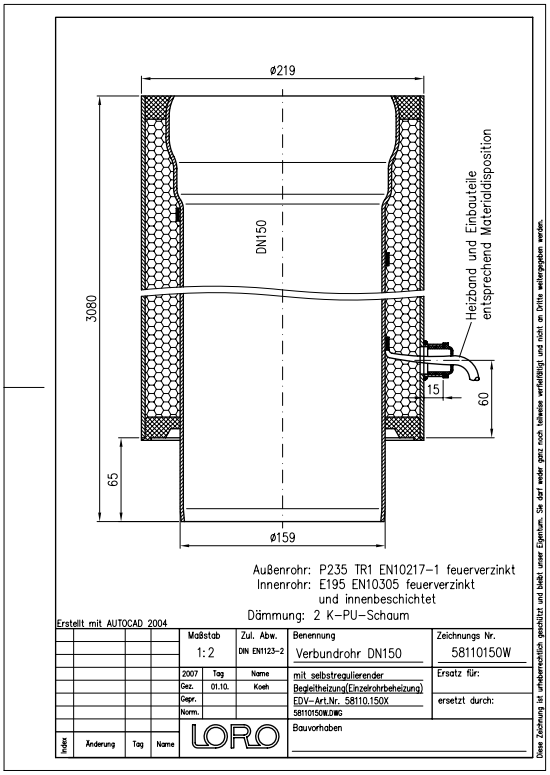

Date articol

Cod EAN	**4038088039366**
Clasă ETIM	**EC010225**
Diametru nominal	**DN 150**
Lungime/grad nominal	**3000**
Dimensiuni exterioare (ÎxLxA)	**241 x 219 x 3080 mm**
Greutate	**90,00 Kg (STK)**
Grupă de produse	**3**
Număr tarif vamal	**73063018**
Material / Culoare	**Stahl feuerverzinkt, Silber**

Notă de utilizare

kein Verwendungshinweis notwendig

Descărcări

Alles online

Desen CAD (PDF)
CAD (DWG)
Broșură (PDF)
CAD 2D (DXF)