Ficha técnica do produto

LORO_Produkt-Datenblatt_58110.150X_pt.pdf
Artigo 58110.150X
29.10.2026, 20:53

LX-VERBUNDROHR M. BEGLEITHEIZUNG DN150 3

LORO multilayer pipe with trace heating

Texto para caderno de encargos

LORO-X compound pipe consisting of: Inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, in accordance with DIN EN 1123 with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC-free) and outer pipe (LORO-X pipe, hot-dip galvanized), 3000 mm long, DN150, with self-regulating trace heating with connecting cable 3 x 1.5 mm², cable length ca. 1 m

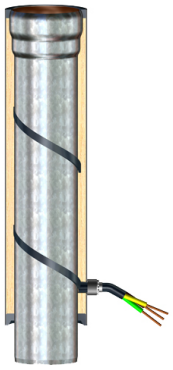

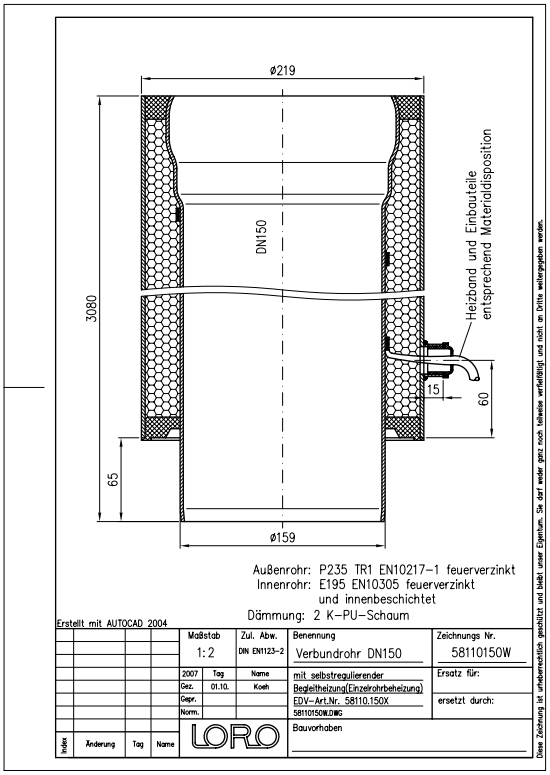

Dados do artigo

Código EAN	4038088039366
Classe ETIM	EC010225
Diâmetro nominal	DN 150
Comprimento/grau nominal	3000
Medidas exteriores (AxLxP)	241 x 219 x 3080 mm
Peso	90,00 Kg (STK)
Grupo de produtos	3
Número de pauta aduaneira	73063018
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

kein Verwendungshinweis notwendig

Transferências

Alles online

Desenho cotado (PDF)
Brochura (PDF)
CAD 2D (DXF)
CAD (DWG)